


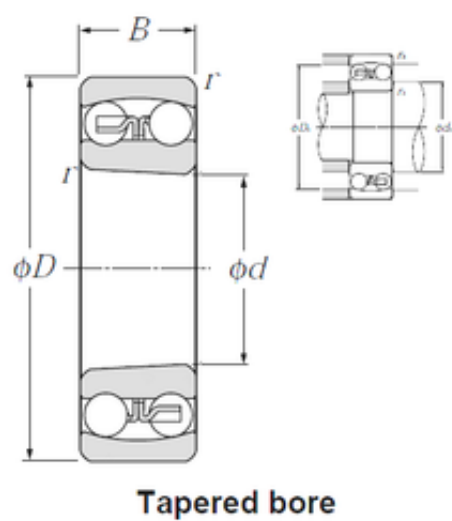

Bearing No. 2215SK

e	0.25
d	75 mm
D	130 mm
B	31 mm
C	31 mm
Y0	2.6
Y2	3.9
Y1	2.5
Mass	1.6 kg
ra max	1.5 mm
Da max	122 mm
Ce min	12 mm
db min	80 mm
da max	93 mm
da min	83 mm
rs min	1.5 mm
Weight	1,6 Kg
r min.	1,5 mm
Da max.	122 mm
da min.	83 mm
ra max.	1,5 mm
Size (mm)	75x130x31
Width (mm)	31
Nlim (oil)	5,300 rpm
Nlim (grease)	4,300 rpm
Bearing number	2215SK
Precision class	P0
Dynamic load, C	44.5 kN
Static load, C0	17.8 kN
Bore Diameter (mm)	75

Outer Diameter (mm)	130
Radial clearance class	CN
Calculation factor (e)	0,25
(Oil) Lubrication Speed	5 300 r/min
Calculation factor (Y1)	2,5
Calculation factor (Y0)	2,6
(Grease) Lubrication Speed	4 300 r/min
Associated sleeve reference	H315X
Basic dynamic load rating (C)	44,5 kN
Basic static load rating (C0)	17,8 kN
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C