


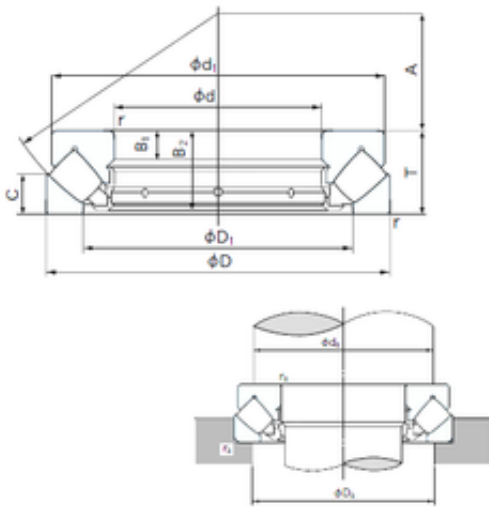

Bearing No. 29384E

C	68 mm
B	48 mm
d	420 mm
D	650 mm
T	140 mm
A	235 mm
B1	48 mm
D1	520 mm
d1	626 mm
B2	135 mm
Width	140 mm
r min.	6 mm
Weight	170 Kg
da min.	525 mm
Da max.	575 mm
ra max.	5 mm
da (min)	525 mm
Da (max)	575 mm
ra (max)	5 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	420 mm
Size (mm)	420x650x140
Width (mm)	140
Configuration	Single Row
Bearing number	29384E
Outside Diameter	650 mm
Static Load Rating	17,900,000 N
Bore Diameter (mm)	420
Dynamic Load Rating	3,900,000 N

Outer Diameter (mm)	650
Limiting Speed - Oil	480 rpm
Fillet Radius/Chamfer	6 mm
Basic dynamic load rating (C)	3900 kN
Basic static load rating (C0)	17900 kN