


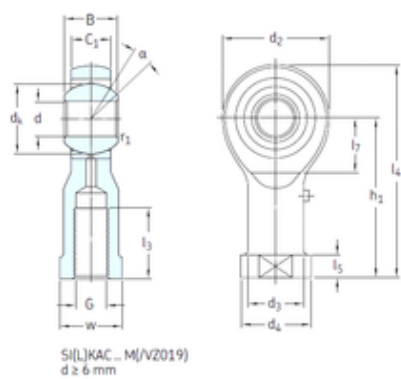

Bearing No. SIKAC16M/VZ019

B	21 mm
d	16 mm
w	22 Tolerance h14
l5	8 mm
d2	43 mm
d3	22 mm
dk	28,5 mm
h1	64 mm
C1	15,5 mm
Angle	15 °
Weight	0,22 Kg
l3 min.	28 mm
r1 min.	0,3 mm
l7 min.	21 mm
l4 max.	87 mm
d4 max.	29 mm
Thread (G)	M16x1,5 Tolerance 6H
Bearing number	SIKAC16M/VZ019
Bore Diameter (mm)	16
Basic dynamic load rating (C)	21,6 kN