


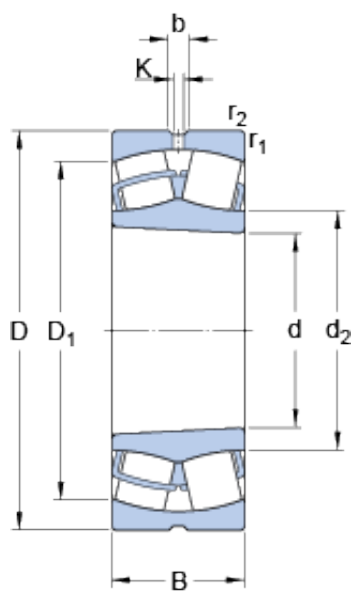

Bearing No. 22212 EK

D	110 mm
d	60 mm
B	28 mm
b	6 mm
K	3 mm
Bore	2.362 Inch 60 Millimeter
Noun	Bearing
Width	1.102 Inch 28 Millimeter
UNSPSC	31171510
series:	222
Category	Spherical Roller Bearing
Size (mm)	110x60x28
Inventory	2.0
Enclosure	Open
cage type:	Inner Ring Guided
bore type:	Tapered 1:12
Width (mm)	28
Bore Profile	Tapered
maximum rpm:	7500 RPM
Weight / LBS	2.516
Mass bearing	1.15 kg
Product Group	B04311
Inch - Metric	Metric
closure type:	Open
D ₁	96.5 mm
d ₂	72.7 mm
Cage Material	Steel
Relubricatable	Yes

Withdrawal Nut	KM14
Bearing number	22212 EK
Keyword String	Spherical
bore diameter:	60 mm
cage material:	Steel
fillet radius:	1.5 mm
overall width:	4.3800 in
Other Features	Order adapter or withdrawal sleeve or nut separately. Others may be available
Limiting speed	7500 r/min
Rolling Element	Spherical Roller Bearing
finish/coating:	Uncoated
Mounting Method	Adapter Mount
Reference speed	5600 r/min
Manufacturer URL	http://www.skf.com
outer ring type:	Not Split
Long Description	60MM Tapered Bore; 110MM Outside Diameter; 28MM Width; C0-Medium Clearance; Adapter Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable; Adapter Part Nu
Outside Diameter	4.331 Inch 110 Millimeter
outer ring width:	28 mm
precision rating:	Not Rated
outside diameter:	110 mm
bearing material:	Steel
Manufacturer Name	SKF

Weight / Kilogram	1.14
Withdrawal Sleeve	AHX312 (Specify bore)
Bore Diameter (mm)	110
r_a max.	1.5 mm
D_a max.	101 mm
Internal Clearance	C0-Medium
internal clearance:	C0
Adapter Part Number	SNW12 H312 HA312 HE312 HS312 (Specify Bore) Inch H312 (Specify bore) Millimeter
Outer Diameter (mm)	60
$r_{1,2}$ min.	1.5 mm
d_a - min.	67.2 mm
d_a - max.	72 mm
Calculation factor e	0.24
Minimum Buy Quantity	N/A
D_a - max.	101 mm
r_a - max.	1.5 mm
D_1 ?	96.5 mm
d_2 ?	72.7 mm
static load capacity:	166 kN
Harmonized Tariff Code	84823080
$r_{1,2}$ - min.	1.5 mm
dynamic load capacity:	156 kN
Calculation factor - e	0.24
lubrication hole type:	Lubrication Groove & Hole
Number of Rows of Rollers	Double Row
Basic dynamic load rating C	159 kN
operating temperature range:	Maximum of +390 °F

Basic dynamic load rating - C	159 kN
Calculation factor Y_1	2.8
Calculation factor Y_2	4.2
Calculation factor Y_0	2.8
Fatigue load limit P_u	18.6 kN
Calculation factor - Y_1	2.8
Fatigue load limit - P_u	18 kN
Calculation factor - Y_0	2.8
Calculation factor - Y_2	4.2
Basic static load rating C_0	166 kN
Basic static load rating - C_0	163 kN
Recommended lock nut tightening angle ?	115 °