


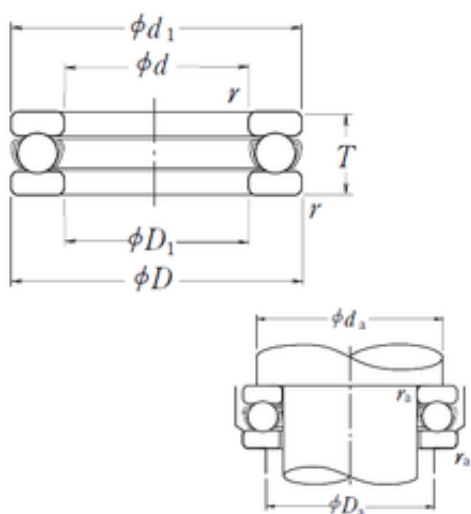

Bearing No. 51108

r	0.6
C	27.1
d	40 mm
D	60 mm
T	13 mm
C0	63
Z_	20
B_	13
da	52
D1	42 mm
ra	0.6
D_	60
d1	60 mm
T_	13
DA_	7.144
D_1	42
SRI	3.9
D_a	48
SRE	3.9
SREX	0.04
KBRG	5111
mass	0.12
SRIX	0.04
SRIN	0
SREN	0
yobi	51108
SDM_	50
Noun	Bearing
UNSPSC	31171552
LangID	1

Height	0.512 Inch 13 Millimeter
Bore 2	1.654 Inch 42 Millimeter
Bore 1	1.575 Inch 40 Millimeter
Banded	No
r min.	0,6 mm
Weight	0,12 Kg
hidYobi	51108
GRS rpm	3600
da min.	52 mm
Da max.	48 mm
ra max.	0,6 mm
series:	51100
Oil rpm	5300
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	40x60x13
race type:	Flat
Width (mm)	13
Prod_Type3	TB_SD_WFS
maximum rpm:	5300 rpm
Weight / LBS	0.26455
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
cage material:	Steel Cage
overall width:	13 mm
Other Features	Single Row With Flat Seat
Keyword String	Ball Thrust

Thrust Bearing	Yes
bore diameter:	40 mm
Bearing number	51108
fillet radius:	.6 mm
Precision Class	Non-Precision
Rolling Element	Ball Bearing
Outside Diameter	2.362 Inch 60 Millimeter
Manufacturer URL	http://www.nskamericas.com
Long Description	40MM Bore 1; 42MM Bore 2; 60MM Outside Diameter; 13MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
outside diameter:	60 mm
Manufacturer Name	NSK
Weight / Kilogram	0.12
precision rating:	ABEC1, P0
Bore Diameter (mm)	40
Outer Diameter (mm)	60
separable or banded:	Separable
thrust bearing type:	Single-Direction
Minimum Buy Quantity	N/A
static load capacity:	14100 lbf
Component Description	Roller Assembly Plus Raceways
dynamic load capacity:	6100 lbf
Harmonized Tariff Code	8482.10.50.08
Manufacturer Item Number	51108
outside diameter design:	Straight
(Grease) Lubrication Speed	3600 r/min

Single or Double Direction	Single Direction
operating temperature range:	Maximum of +120 °C
Basic dynamic load rating (C)	27,1 kN
Basic static load rating (C0)	63 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter