


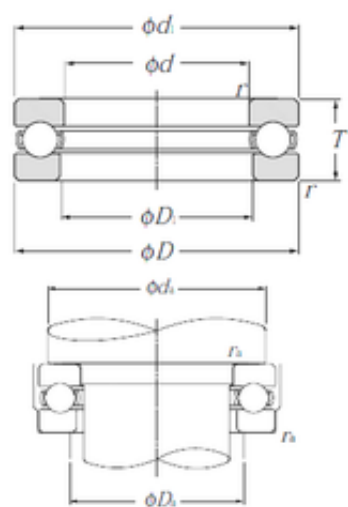

Bearing No. 51108

D	60 mm
d	40 mm
T	13 mm
d1	60 mm
D1	42 mm
Noun	Bearing
Bore 2	1.654 Inch 42 Millimeter
Weight	0,125 Kg
Bore 1	1.575 Inch 40 Millimeter
UNSPSC	31171552
Banded	No
r min.	0,6 mm
Height	0.512 Inch 13 Millimeter
da min.	52 mm
ra max.	0,6 mm
Da max.	48 mm
series:	511
Category	Thrust Ball Bearings
Inventory	2.0
Size (mm)	40x60x13
Width (mm)	13
Weight / LBS	0.27558
maximum rpm:	5000 rpm
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
bore diameter:	40 mm
overall width:	13 mm

Keyword String	Ball Thrust
cage material:	Steel
fillet radius:	0.6 mm
Bearing number	51108
Other Features	Single Row With Flat Seat
Thrust Bearing	Yes
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	40MM Bore 1; 42MM Bore 2; 60MM Outside Diameter; 13MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	2.362 Inch 60 Millimeter
outside diameter:	60 mm
Manufacturer Name	NTN
Weight / Kilogram	0.117
bearing material:	High Carbon Chrome Steel
precision rating:	ISO Class 0
Bore Diameter (mm)	40
Outer Diameter (mm)	60
thrust bearing type:	Single-Direction
Minimum Buy Quantity	N/A
separable or banded:	Separable
Component Description	Roller Assembly Plus Raceways
static load capacity:	63000 N
dynamic load capacity:	26900 N
Harmonized Tariff Code	8482.10.50.08

Manufacturer Item Number	51108
outside diameter design:	Straight
(Grease) Lubrication Speed	3 500 r/min
Single or Double Direction	Single Direction
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	63 kN
Basic dynamic load rating (C)	26,9 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter