


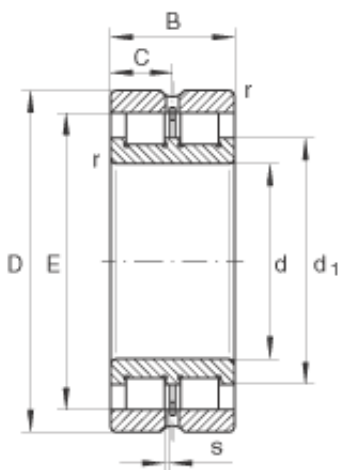

Bearing No. SL024980

|                     |                                             |
|---------------------|---------------------------------------------|
|                     | NNCL4980V /<br>Designation to DIN 5412      |
| S                   | 7 mm / Axial<br>displacement                |
| m                   | 94,6 kg / Weight                            |
| d                   | 400 mm                                      |
| D                   | 540 mm                                      |
| B                   | 140 mm                                      |
| C                   | 70 mm                                       |
| E                   | 501,74 mm                                   |
| Size (mm)           | 400x540x140                                 |
| Width (mm)          | 140                                         |
| n <sub>G</sub>      | 650 1/min / Limiting<br>speed               |
| C <sub>r</sub>      | 2310000 N / Dynamic<br>load rating (radial) |
| d <sub>1</sub>      | 450,5 mm                                    |
| C <sub>0r</sub>     | 5800000 N / Static load<br>rating (radial)  |
| C <sub>ur</sub>     | 600000 N / Fatigue limit<br>load, radial    |
| Bearing number      | SL024980                                    |
| r <sub>min</sub>    | 4 mm                                        |
| Bore Diameter (mm)  | 400                                         |
| Outer Diameter (mm) | 540                                         |