


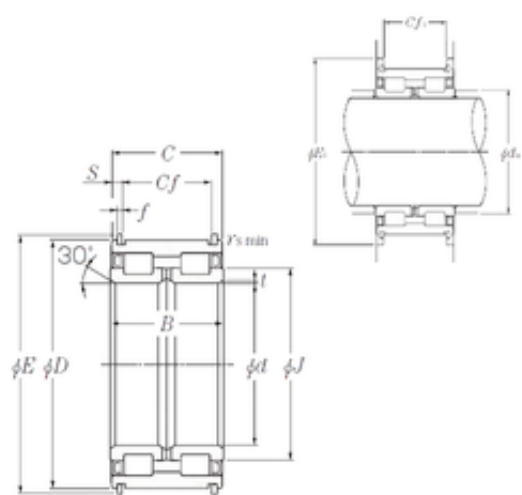

Bearing No. SL04-5008NR

S	4,5 mm
d	40 mm
D	68 mm
B	38 mm
C	37 mm
t	0,8 mm
f	2 mm
E	71,8 mm
J	51 mm
da	43,5 mm
E1	82 mm
Cf	28 mm
Cf1	28 mm
Bore	1.575 Inch 40 Millimeter
Noun	Bearing
Width	1.496 Inch 38 Millimeter
r min.	0,6 mm
Weight	0,552 Kg
UNSPSC	31171547
series:	SL04
Profile	Complete with Outer and Inner Ring
Category	Cylindrical Roller Bearing
Retainer	No
flanges:	(1) Outer Ring, Two-Piece Inner Ring
Separable	No
Inventory	0.0
Snap Ring	Yes

Size (mm)	40x68x38
Width (mm)	38
bore type:	Straight
Weight / LBS	1.244
Bore Profile	Straight
closure type:	Double Shield
Cage Material	None
Product Group	B04144
Inch - Metric	Metric
bore diameter:	40 mm
overall width:	38 mm
cage material:	None
fillet radius:	1 mm
Bearing number	SL04-5008NR
Relubricatable	Yes
Other Features	Full Complement 3 Rib Inner Ring 1 Rib Outer Ring
number of rows:	2
finish/coating:	Uncoated
Rolling Element	Cylindrical Roller Bearing
Precision Class	RBEC 1 ISO P0
Long Description	40MM Bore; Straight Bore Profile; 68MM Outside Diameter; 38MM Width; RBEC 1 ISO P0; Double Row; Not Separable; Snap Ring; Relubricatable; C0-Medium Internal Clearance; No Retainer
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	2.677 Inch 68 Millimeter

precision rating:	ISO Class 0
Manufacturer Name	NTN
bearing material:	Hardened Alloy Steel
Weight / Kilogram	0.57
outside diameter:	68 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	40
internal clearance:	CN
Outer Diameter (mm)	68
Minimum Buy Quantity	N/A
static load capacity:	116000 N
Harmonized Tariff Code	8482.50.00.00
dynamic load capacity:	79500 N
Manufacturer Item Number	SL04-5008NR
Number of Rows of Rollers	Double Row
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	116 kN
Basic dynamic load rating (C)	79,5 kN