


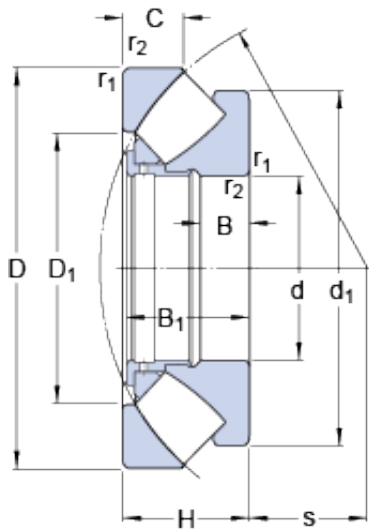

Bearing No. 294/600 EM

D	1030 mm
d	600 mm
H	258 mm
B	99 mm
C	128 mm
s	349 mm
Size (mm)	1030x600x258
Width (mm)	258
Mass bearing	845 kg
B ₁	249 mm
d ₁	940 mm
D ₁	769 mm
B ₁	249 mm
Limiting speed	530 r/min
Bearing number	294/600 EM
Reference speed	280 r/min
r _a max.	10 mm
D _a max.	900 mm
d _a min.	815 mm
Bore Diameter (mm)	1030
Outer Diameter (mm)	600
d _a - min.	815 mm
D _a - max.	900 mm
r _a - max.	10 mm
r _{1,2} min.	12 mm
D ₁ ?	769 mm
d ₁ ?	940 mm
r _{1,2} - min.	12 mm
Factor min. axial load - A	300

Basic dynamic load rating C	13100 kN
Minimum axial load factor A	300
Basic dynamic load rating - C	13100 kN
Fatigue load limit P_u	4000 kN
Fatigue load limit - P_u	4000 kN
Basic static load rating C_0	56000 kN
Basic static load rating - C_0	56000 kN