


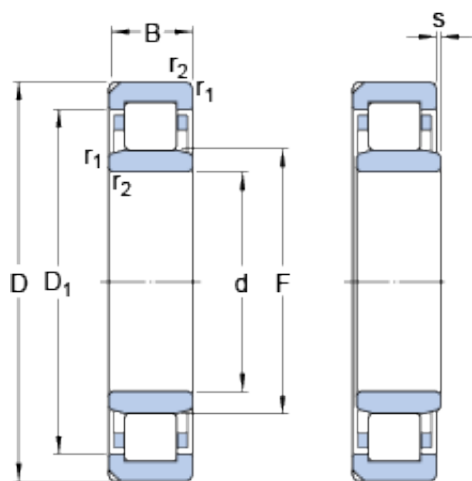

Bearing No. NU 1080 N2MA

h	15 mm
d	400 mm
D	600 mm
B	90 mm
F	450 mm
s	14 mm
s max.	14 mm
Size (mm)	600x400x90
Width (mm)	90
Mass bearing	90 kg
D ₁	527 mm
b ₁	12.5 mm
Limiting speed	1500 r/min
Bearing number	NU 1080 N2MA
Reference speed	1100 r/min
Limiting value e	0.2
d _a min.	418 mm
r _a max.	4 mm
D _a max.	582 mm
d _b min.	455 mm
d _a max.	446 mm
Bore Diameter (mm)	600
Axial load factor Y	0.6
Outer Diameter (mm)	400
d _b - min.	455 mm
r _{1,2} min.	5 mm
D _a - max.	582 mm
d _a - min.	418 mm
d _a - max.	446 mm
r _a - max.	4 mm

D_1 ?	527 mm
$r_{1,2}$ - min.	5 mm
Basic dynamic load rating C	1380 kN
Basic dynamic load rating - C	1380 kN
Calculation factor k_r	0.15
Fatigue load limit P_u	196 kN
Calculation factor - k_r	0.15
Fatigue load limit - P_u	196 kN
Basic static load rating C_0	2320 kN
Basic static load rating - C_0	2320 kN