


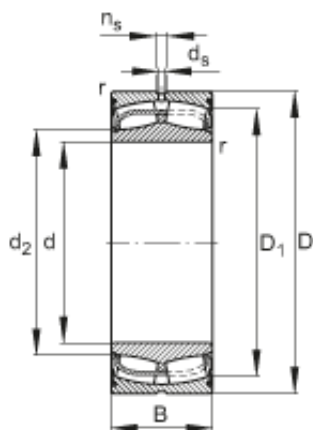

**Bearing No. 24130-E1-2VSR**

|                     |                                          |
|---------------------|------------------------------------------|
| m                   | 20,6 kg / Weight                         |
| e                   | 0,37                                     |
| d                   | 150 mm                                   |
| D                   | 250 mm                                   |
| B                   | 100 mm                                   |
| Size (mm)           | 150x250x100                              |
| Width (mm)          | 100                                      |
| $Y_2$               | 2,72                                     |
| $Y_1$               | 1,83                                     |
| $n_s$               | 9,5 mm                                   |
| $d_s$               | 4,8 mm                                   |
| $d_2$               | 163,1 mm                                 |
| $C_r$               | 1050000 N / Dynamic load rating (radial) |
| $Y_0$               | 1,79                                     |
| $n_G$               | 590 1/min / Limiting speed               |
| $D_1$               | 228,9 mm                                 |
| $C_{0r}$            | 1520000 N / Static load rating (radial)  |
| Bearing number      | 24130-E1-2VSR                            |
| $C_{ur}$            | 148000 N                                 |
| $r_{min}$           | 2,1 mm                                   |
| $r_{a \max}$        | 2,1 mm                                   |
| $d_{a \min}$        | 162 mm                                   |
| $D_{a \max}$        | 238 mm                                   |
| Bore Diameter (mm)  | 150                                      |
| Outer Diameter (mm) | 250                                      |