


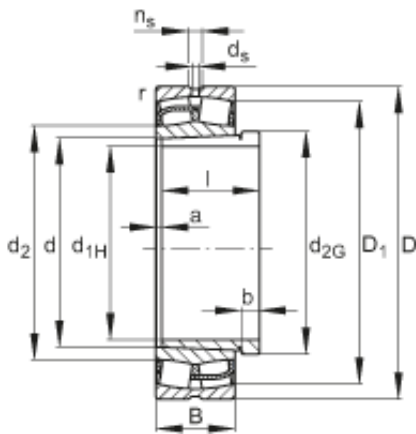

Bearing No. 24130-E1-K30 + AH24130

	AH24130 / Designation, withdrawal sleeve
l	115 mm
a	11 mm
m	20,2 kg / Weight
d	150 mm
e	0,37
b	15 mm
B	100 mm
D	250 mm
Size (mm)	145x250x100
Width (mm)	100
Y_2	2,72
Y_1	1,83
Y_0	1,79
C_r	1050000 N
m_1	1,63 kg / Weight, withdrawal sleeve
n_G	2370 1/min / Limiting speed
n_B	1280 1/min / Reference speed
d_s	4,8 mm
n_s	9,5 mm
d_2	170,3 mm
D_1	213 mm
d_{2G}	M160X3
d_{1H}	145 mm
C_{0r}	1520000 N / Static load rating (radial)

Bearing number	24130-E1-K30 + AH24130
r_{min}	2,1 mm
$r_{a\ max}$	2,1 mm
$d_{a\ min}$	162 mm
$D_{a\ max}$	238 mm
Bore Diameter (mm)	145
Outer Diameter (mm)	250