


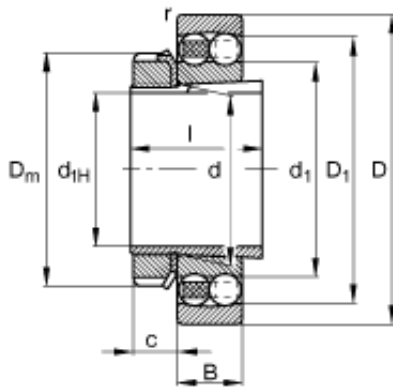

Bearing No. 1317-K-M-C3 + H317

|                |                                           |
|----------------|-------------------------------------------|
|                | H317 / Adapter sleeve                     |
| d              | 85 mm                                     |
| m              | 5,32 kg / Weight                          |
| e              | 0,22                                      |
| D              | 180 mm                                    |
| B              | 41 mm                                     |
| l              | 63 mm                                     |
| c              | 18 mm                                     |
| Size (mm)      | 75x180x41                                 |
| Width (mm)     | 41                                        |
| $m_1$          | 1,19 kg / Weight,<br>adapter sleeve       |
| $Y_1$          | 2,88                                      |
| $d_1$          | 117,2 mm                                  |
| $Y_2$          | 4,46                                      |
| $D_m$          | 110 mm                                    |
| $C_r$          | 99000 N / Dynamic load<br>rating (radial) |
| $D_1$          | 152 mm                                    |
| $Y_0$          | 3,02                                      |
| $n_G$          | 5600 1/min / Limiting<br>speed            |
| $n_B$          | 6000 1/min / Reference<br>speed           |
| $C_{0r}$       | 37500 N / Static load<br>rating (radial)  |
| Bearing number | 1317-K-M-C3 + H317                        |
| $C_{ur}$       | 2010 N / Fatigue limit<br>load, radial /  |
| $d_{1H}$       | 75 mm                                     |
| $r_{a \max}$   | 2,5 mm                                    |

|                     |        |
|---------------------|--------|
| $d_{b \text{ min}}$ | 91 mm  |
| $D_{a \text{ max}}$ | 166 mm |
| $B_{a \text{ min}}$ | 6 mm   |
| $d_{a \text{ max}}$ | 114 mm |
| Bore Diameter (mm)  | 75     |
| Outer Diameter (mm) | 180    |