


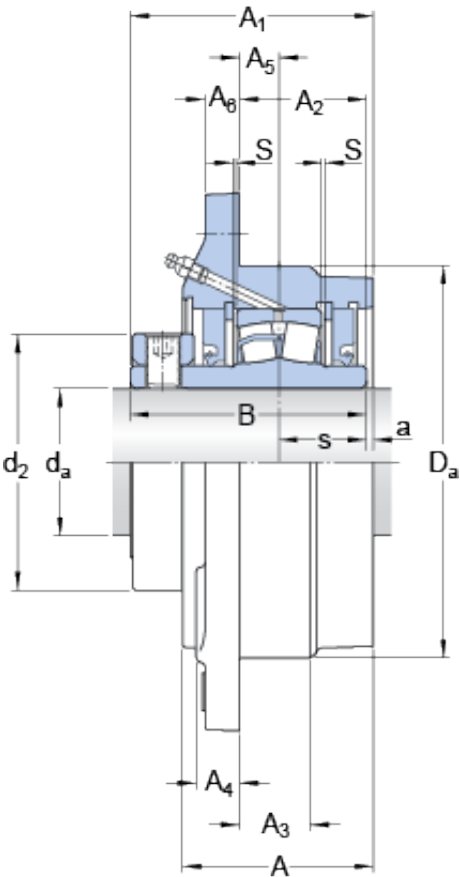

Bearing No. FYRP 1 15/16-3

|                |                     |
|----------------|---------------------|
| L              | 161.925 mm          |
| a              | 7.144 mm            |
| A              | 63.5 mm             |
| S              | 0.794 mm            |
| s              | 25.4 mm             |
| J              | 136.525 mm          |
| B              | 73.025 mm           |
| Size (mm)      | 49.212x73.819x114.3 |
| Width (mm)     | 114,3               |
| A <sub>1</sub> | 79.375 mm           |
| D <sub>a</sub> | 114.3 mm            |
| d <sub>2</sub> | 73.819 mm           |
| d <sub>a</sub> | 49.212 mm           |
| A <sub>4</sub> | 15.875 mm           |
| A <sub>5</sub> | 15.875 mm           |
| N <sub>1</sub> | 12.7 mm             |
| A <sub>6</sub> | 14.288 mm           |
| A <sub>3</sub> | 22.225 mm           |
| A <sub>5</sub> | 15.875 mm           |
| A <sub>4</sub> | 15.875 mm           |
| A <sub>3</sub> | 22.225 mm           |
| A <sub>2</sub> | 40.481 mm           |
| A <sub>1</sub> | 79.375 mm           |
| D <sub>a</sub> | 114.3 mm            |
| d <sub>2</sub> | 73.819 mm           |
| d <sub>a</sub> | 49.212 mm           |
| A <sub>6</sub> | 14.287 mm           |
| N <sub>1</sub> | 12.7 mm             |
|                |                     |

|                               |                |
|-------------------------------|----------------|
| A <sub>2</sub>                | 40.481 mm      |
| Bearing number                | FYRP 1 15/16-3 |
| Limiting speed                | 1450 r/min     |
| Mass bearing unit             | 3.72 kg        |
| Bore Diameter (mm)            | 49,212         |
| Outer Diameter (mm)           | 73,819         |
| Attachment bolt diameter G    | 11.113 mm      |
| Basic dynamic load rating C   | 84.5 kN        |
| Basic dynamic load rating - C | 84.5 kN        |