


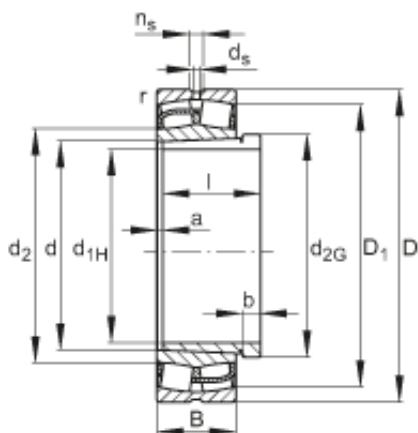

Bearing No. 24128-E1-K30 + AH24128

	AH24128 / Designation, withdrawal sleeve
l	99 mm
a	10 mm
m	13,5 kg / Weight
d	140 mm
e	0,34
b	14 mm
B	85 mm
D	225 mm
Size (mm)	135x225x85
Width (mm)	85
Y_2	2,96
Y_1	1,99
Y_0	1,94
C_r	800000 N
m_1	1,29 kg / Weight, withdrawal sleeve
n_G	2650 1/min / Limiting speed
n_B	1450 1/min / Reference speed
d_s	4,8 mm
n_s	9,5 mm
d_2	158,9 mm
D_1	194,4 mm
d_{2G}	M150X2
d_{1H}	135 mm
C_{0r}	1190000 N / Static load rating (radial)

Bearing number	24128-E1-K30 + AH24128
r_{min}	2,1 mm
$r_{a\ max}$	2,1 mm
$d_{a\ min}$	152 mm
$D_{a\ max}$	213 mm
Bore Diameter (mm)	135
Outer Diameter (mm)	225