


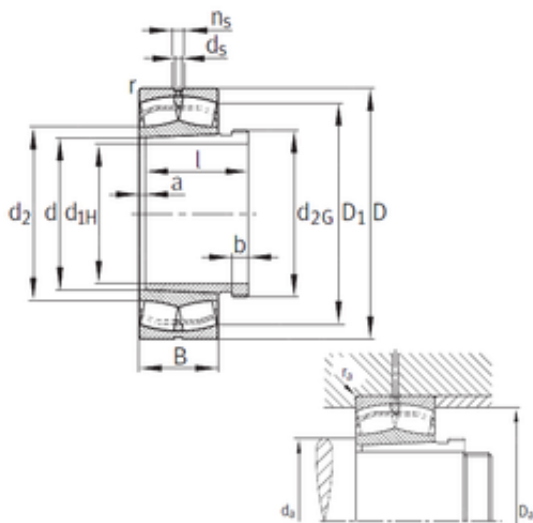

Bearing No. 24128-E1-K30+AH+AH24128

n	9,5 mm
C	85 mm
b	14 mm
a	10 mm
d	140 mm
l	99 mm
D	225 mm
B	85 mm
d2	158,9 mm
D1	194,8 mm
d5	4,8 r/min
d1	135 mm
Weight	13,38 Kg
r min.	2,1 mm
da min.	152 mm
Da max.	213 mm
ra max.	2,1 mm
Size (mm)	140x225x85
Width (mm)	85
Thread (G)	M150X2
Limiting speed	2 400 r/min
Bearing number	24128-E1-K30+AH+AH2 4128
Reference speed	1 320 r/min
Bore Diameter (mm)	140
Outer Diameter (mm)	225
Calculation factor (e)	0,32
Fatigue load limit (Pu)	124 000
Calculation factor (Y0)	1,94
Calculation factor (Y1)	1,99

Calculation factor (Y2)	2,96
Basic dynamic load rating (C)	800 000 kN
Basic static load rating (C0)	1 190 000 kN