


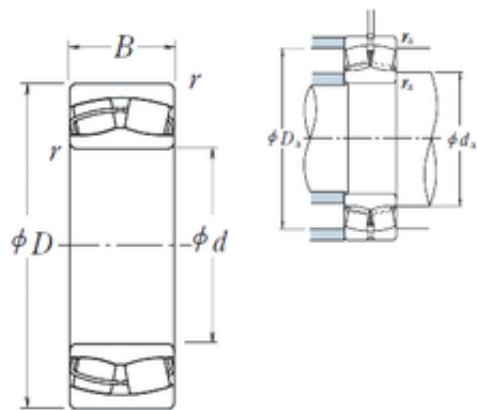

Bearing No. 24128CE4

e	0.35
r	2.1
d	140 mm
D	225 mm
B	85 mm
C	85 mm
Y3	1.9
X2	0.67
C0	1160
ra	2
Z_	22
D_	225
Y1	1.9
X0	1
Y2	2.9
B_	85
Y0	1.9
X1	1
DI_	161.691
DA_	21
DE_	202.601
SIR	34
Bore	5.512 Inch 140 Millimeter
Noun	Bearing
bomp	24128CE4
mass	13
ALP2	5
SBRG	41
ALP3	0

ALP1	13
SDM_	182.146
yobi	24128CE4
KBRG	2322
Width	3.346 Inch 85 Millimeter
ALPHA_	0.228
da max	156 mm
Da min	193 mm
r min.	2,1 mm
Weight	13 Kg
UNSPSC	31171510
da min	152
LangID	1
da min.	152 mm
D_a min	192
D_a max	213
ra max.	2 mm
TSR rpm	1600
GRS rpm	1200
Da max.	213 mm
Oil rpm	1600
hidYobi	24128CE4
hidTable	ecat_NSSPHR
Category	Spherical Roller Bearing
Macha rpm	0
Size (mm)	140x225x85
Inventory	0.0
Enclosure	Open
Width (mm)	85
Prod_Type3	SRB_CTB_CB
Weight / LBS	13
Bore Profile	Straight

Inch - Metric	Metric
Cage Material	Steel
Product Group	B04311
Bearing number	24128CE4
Keyword String	Spherical
Relubricatable	Yes
Rolling Element	Spherical Roller Bearing
Mounting Method	Shaft Mount
Outside Diameter	8.858 Inch 225 Millimeter
Manufacturer URL	http://www.nskamericas.com
Long Description	140MM Straight Bore; 225MM Outside Diameter; 85MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
Manufacturer Name	NSK
Weight / Kilogram	13
Withdrawal Sleeve	Not Applicable
Internal Clearance	C0-Medium
Bore Diameter (mm)	140
Adapter Part Number	Not Applicable Inch Not Applicable Millimeter
Outer Diameter (mm)	225
Minimum Buy Quantity	N/A
Harmonized Tariff Code	84823080
Calculation factor (e)	0,35
Calculation factor (Y2)	2,9
Calculation factor (Y0)	1,9
(Oil) Lubrication Speed	1600 r/min

Manufacturer Item Number	24128CE4
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	1200 r/min
Basic static load rating (C0)	1160 kN
Basic dynamic load rating (C)	670 kN