




Bearing No. FYT 1. TF

N	12,7 mm
T	38,8 mm
d	25,4 mm
B	34,1 mm
G	10 mm
H	124 mm
J	98,8 mm
L	70 mm
s1	19,8 mm
A1	30 mm
A2	12 mm
Bore	1 Inch 25.4 Millimeter
Noun	Bearing
Seals	M Seal
UNSPSC	31171501
Weight	0,6 Kg
Category	Flange Block
Inventory	0.0
Width (mm)	34,1
Bolt Spacing	3.906 Inch 99.2 Millimeter
Weight / LBS	1.3
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Other Features	Single Row Standard Duty Wide Inner Race Open End Has Flinger Y Bearing
Keyword String	Flanged
Mounting Bolts	7/16 Inch

Relubricatable	Yes
Bearing number	FYT 1. TF
Rolling Element	Ball Bearing
Mounting Method	Set Screw
Manufacturer URL	http://www.skf.com
Long Description	2 Bolt Flange Block; 1" Bore; 3.9" Bolt Circle; 3-29/32" Bolt Spacing; 1 Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 1-11/32" Length Thru Bore; Relubricatable; M Seal Se
Length Thru Bore	1.344 Inch 34.13 Millimeter
Housing Material	Cast Iron
Weight / Kilogram	0.59
Manufacturer Name	SKF
Insert Part Number	YAR 205-100-2F
Bore Diameter (mm)	25,4
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Cartridge Pilot Depth	0 Inch 0 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Fatigue load limit (Pu)	0,335
Manufacturer Item Number	FYT 1. TF
Number of Mounting Holes	2
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Expansion / Non-expansion	Non-expansion
Basic static load rating (C0)	7,8 kN

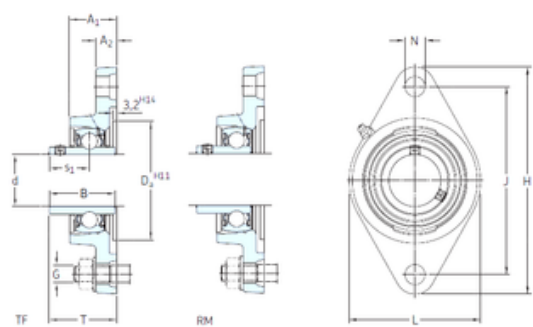

Basic dynamic load rating (C)	14 kN
Nominal Bolt Circle Diameter Round	3.9 Inch 99 Millimeter