




Bearing No. FYT 1.1/2 RM

N	14,3 mm
T	52,6 mm
d	38,1 mm
B	40 mm
G	12 mm
H	171,5 mm
J	143,7 mm
L	102 mm
s1	28,5 mm
A1	38,5 mm
A2	14 mm
Bore	1.5 Inch 38.1 Millimeter
Noun	Bearing
Seals	M Seal
UNSPSC	31171501
Weight	1,6 Kg
Category	Flange Block
Inventory	0.0
Width (mm)	40
Bolt Spacing	5.656 Inch 143.67 Millimeter
Weight / LBS	3.4
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Other Features	Single Row Standard Duty Narrow Inner Race Open End Y Bearing
Keyword String	Flanged
Mounting Bolts	1/2 Inch

Relubricatable	Yes
Bearing number	FYT 1.1/2 RM
Rolling Element	Ball Bearing
Mounting Method	Set Screw
Length Thru Bore	1.563 Inch 39.69 Millimeter
Manufacturer URL	http://www.skf.com
Long Description	2 Bolt Flange Block; 1-1/2" Bore; 5.7" Bolt Circle; 5-21/32" Bolt Spacing; 1 Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 1-9/16" Length Thru Bore; Relubricatable; M Seal
Housing Material	Cast Iron
Weight / Kilogram	1.54
Manufacturer Name	SKF
Insert Part Number	YAT 208-108
Bore Diameter (mm)	38,1
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Cartridge Pilot Depth	0 Inch 0 Millimeter
Harmonized Tariff Code	8483.20.40.40
Fatigue load limit (Pu)	0,8
Manufacturer Item Number	FYT 1.1/2 RM
Number of Mounting Holes	2
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Expansion / Non- expansion	Non-expansion
Basic static load rating (C0)	19 kN

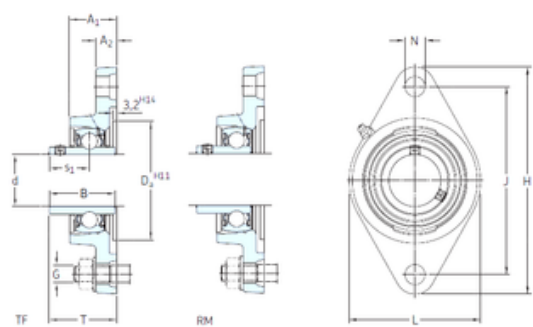

Basic dynamic load rating (C)	30,7 kN
Nominal Bolt Circle Diameter Round	5.7 Inch 144 Millimeter