


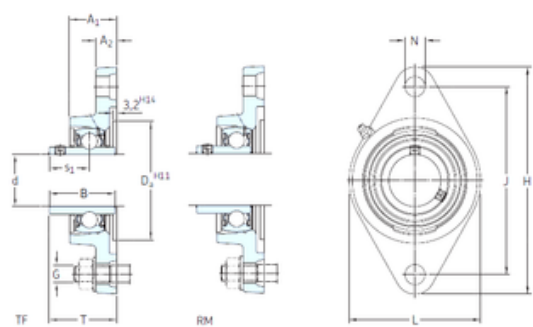

Bearing No. FYT 1.1/2 TF

N	14,3 mm
H	171,5 mm
T	54,2 mm
d	38,1 mm
L	102 mm
J	143,7 mm
B	49,2 mm
G	12 mm
A2	14 mm
A1	38,5 mm
s1	30,2 mm
Noun	Bearing
Bore	1.5 Inch 38.1 Millimeter
Seals	M Seal
Weight	1,7 Kg
UNSPSC	31171501
series:	FYT
Category	Flange Block
Inventory	0.0
Width (mm)	49,2
duty type:	Standard Duty
bore type:	Round
seal type:	Contact with Flinger
maximum rpm:	4800 RPM
Weight / LBS	3.7
Bolt Spacing	5.656 Inch 143.67 Millimeter
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110

bore diameter:	1.5000 in
Keyword String	Flanged
mounting type:	Two-Bolt Flange
Other Features	Single Row Standard Duty Wide Inner Race Open End Has Flinger Y Bearing
Bearing number	FYT 1.1/2 TF
Relubricatable	Yes
Mounting Bolts	1/2 Inch
expansion type:	Non-Expansion Bearing (Fixed)
locking device:	Set Screw
Mounting Method	Set Screw
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Length Thru Bore	1.938 Inch 49.225 Millimeter
Housing Material	Cast Iron
Manufacturer URL	http://www.skf.com
Long Description	2 Bolt Flange Block; 1-1/2" Bore; 5.7" Bolt Circle; 5-21/32" Bolt Spacing; 1 Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 1-15/16" Length Thru Bore; Relubricatable; M Sea
Manufacturer Name	SKF
lubrication type:	Lubrication Fitting
Weight / Kilogram	1.68
housing material:	Cast Iron
Insert Part Number	YAR 208-108-2F
Bore Diameter (mm)	38,1
Pilot Configuration	No Pilot

length through bore:	54.2 mm
Minimum Buy Quantity	N/A
replacement bearing:	YAR 208-108-2F
Cartridge Pilot Depth	0 Inch 0 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Fatigue load limit (Pu)	0,8
manufacturer upc number:	7316577344366
overall length/diameter:	102 mm
Number of Mounting Holes	2
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Manufacturer Item Number	FYT 1.1/2 TF
Expansion / Non-expansion	Non-expansion
operating temperature range:	Maximum of +110 °F
radial static load capacity:	4280 lbf
bolt center-to-center length:	5.6563 in
Basic static load rating (C0)	19 kN
Basic dynamic load rating (C)	30,7 kN
radial dynamic load capacity:	6910 lbf
Nominal Bolt Circle Diameter Round	5.7 Inch 144 Millimeter