




Bearing No. FYT 1.1/8 TF

N	12,7 mm
T	42,2 mm
d	28,575 mm
B	38,1 mm
G	10 mm
H	141,5 mm
J	116,9 mm
L	83 mm
s1	22,2 mm
A1	32,5 mm
A2	13 mm
Bore	1.125 Inch 28.575 Millimeter
Noun	Bearing
Seals	M Seal
UNSPSC	31171501
Weight	0,95 Kg
Category	Flange Block
Inventory	0.0
Width (mm)	38,1
Bolt Spacing	4.594 Inch 116.7 Millimeter
Weight / LBS	2.1
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Other Features	Single Row Standard Duty Wide Inner Race Open End Has Flinger Y Bearing
Keyword String	Flanged
Mounting Bolts	7/16 Inch

Relubricatable	Yes
Bearing number	FYT 1.1/8 TF
Rolling Element	Ball Bearing
Mounting Method	Set Screw
Long Description	2 Bolt Flange Block; 1-1/8" Bore; 4.6" Bolt Circle; 4-19/32" Bolt Spacing; 1 Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 1-1/2" Length Thru Bore; Relubricatable; M Seal
Housing Material	Cast Iron
Manufacturer URL	http://www.skf.com
Length Thru Bore	1.5 Inch 38.1 Millimeter
Weight / Kilogram	0.95
Manufacturer Name	SKF
Insert Part Number	YAR 206-102-2F
Bore Diameter (mm)	28,575
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Cartridge Pilot Depth	0 Inch 0 Millimeter
Harmonized Tariff Code	8483.20.40.40
Fatigue load limit (Pu)	0,475
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Manufacturer Item Number	FYT 1.1/8 TF
Number of Mounting Holes	2
Expansion / Non-expansion	Non-expansion
Basic static load rating (C0)	11,2 kN
Basic dynamic load rating (C)	19,5 kN

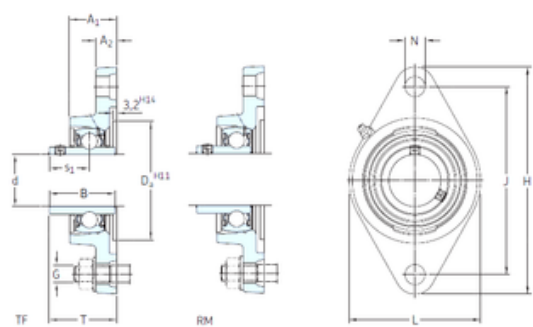

Nominal Bolt Circle Diameter Round	4.6 Inch 117 Millimeter
---------------------------------------	---------------------------