


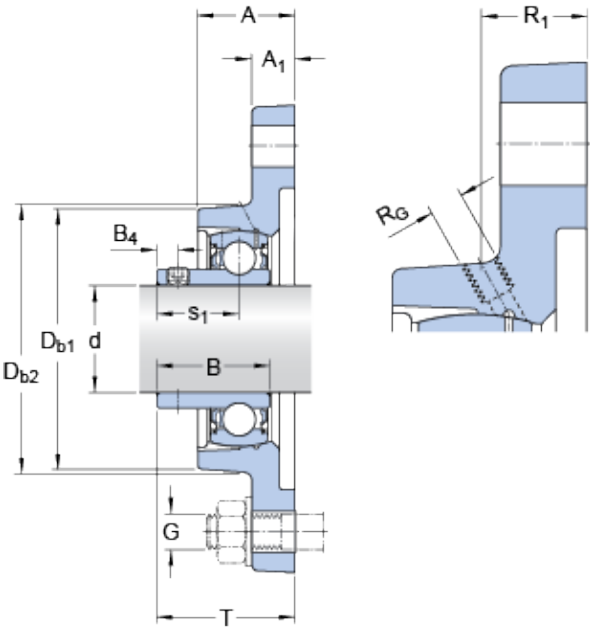

Bearing No. FYT 1.11/16 RM

T	49.8 mm
J	148.5 mm
d	42.863 mm
A	39 mm
B	37 mm
L	111 mm
H	16 mm
Bore	1.688 Inch 42.875 Millimeter
Noun	Bearing
Seals	M Seal
UNSPSC	31171501
Category	Flange Block
Inventory	0.0
Size (mm)	42.863x39x14
Width (mm)	14
Weight / LBS	4.1
Bolt Spacing	5.844 Inch 148.438 Millimeter
S ₁	25.8 mm
Housing Style	2 Bolt Flange Block
J ₆	120.5 mm
J ₇	18 mm
N ₄	2 mm
D _N	6.579 mm
A ₁	14 mm
B ₄	7 mm
R ₁	24 mm
Inch - Metric	Inch

Product Group	M06110
Other Features	Single Row Standard Duty Narrow Inner Race Open End Y Bearing
Mounting Bolts	9/16 Inch
Relubricatable	Yes
Keyword String	Flanged
Bearing number	FYT 1.11/16 RM
Limiting speed	4300 r/min
SW_N	11.112 mm
D_{b2}	111 mm
D_{b1}	102 mm
Rolling Element	Ball Bearing
Mounting Method	Set Screw
Manufacturer URL	http://www.skf.com
Long Description	2 Bolt Flange Block; 1-11/16" Bore; 5.8" Bolt Circle; 5-27/32" Bolt Spacing; 1 Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 1-5/8" Length Thru Bore; Relubricatable; M Sea
Housing Material	Cast Iron
Length Thru Bore	1.625 Inch 41.275 Millimeter
Manufacturer Name	SKF
Weight / Kilogram	1.86
Mass bearing unit	1.75 kg
Bore Diameter (mm)	42,863
Insert Part Number	YAT 209-111
Pilot Configuration	No Pilot
Outer Diameter (mm)	39
$R_?$	45 °

Minimum Buy Quantity	N/A
Cartridge Pilot Depth	0 Inch 0 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	FYT 1.11/16 RM
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Number of Mounting Holes	2
Expansion / Non-expansion	Non-expansion
R_G - 1/8-27 NPT	1/827 NPT
G_N - 1/8-27 NPT	1/827 NPT
Basic dynamic load rating - C	33.2 kN
Nominal Bolt Circle Diameter Round	5.8 Inch 148 Millimeter
Fatigue load limit - P_u	0.915 kN
Thread - G_2 - 5/16-24 UNF	5/1624 UNF
Hexagonal key size for grub screw - H	3.969 mm
Basic static load rating - C_0	21.6 kN