




Bearing No. FYT 1.15/16 FM

N	14 mm
G	32,7 mm
T	35,1 mm
L	15,9 mm
H	157,2 mm
J	116 mm
d	49,213 mm
B1	43,7 mm
A1	43 mm
s1	60,7 mm
Da	189 mm
A2	15 mm
Noun	Bearing
Bore	1.938 Inch 49.225 Millimeter
Seals	M Seal
Weight	2.30 Kg
UNSPSC	31171501
Category	Flange Block
Inventory	0.0
Bolt Spacing	6.188 Inch 157.175 Millimeter
Weight / LBS	5.2
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Bearing number	FYT 1.15/16 FM
Mounting Bolts	9/16 Inch
Keyword String	Flanged
Relubricatable	Yes
Other Features	Single Row Standard

	Duty Narrow Inner Race Open End Y Bearing
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Length Thru Bore	1.719 Inch 43.663 Millimeter
Long Description	2 Bolt Flange Block; 1-15/16" Bore; 6.2" Bolt Circle; 6-3/16" Bolt Spacing; 1 Piece Solid; Eccentric Collar Mount; Cast Iron; Ball Bearing; 1-23/32" Length Thru Bore; Relubricatabl
Housing Material	Cast Iron
Manufacturer URL	http://www.skf.com
Manufacturer Name	SKF
Weight / Kilogram	2.36
Insert Part Number	YET 210-115
Bore Diameter (mm)	49,213
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Cartridge Pilot Depth	0 Inch 0 Millimeter
Harmonized Tariff Code	8483.20.40.40
Number of Mounting Holes	2
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Manufacturer Item Number	FYT 1.15/16 FM
Expansion / Non-expansion	Non-expansion
Basic dynamic load rating (C)	23,2 kN
Basic static load rating (C0)	0,98 kN

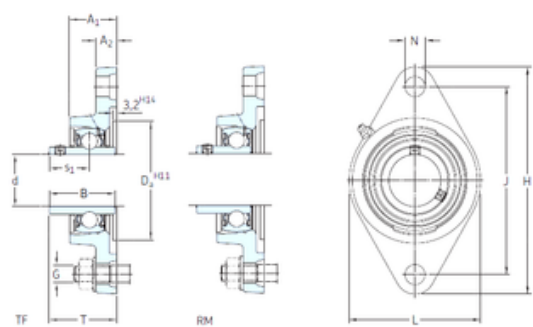

Nominal Bolt Circle Diameter Round	6.2 Inch 157 Millimeter
---------------------------------------	---------------------------