




Bearing No. FYT 1.15/16 TF

N	15,9 mm
T	60,6 mm
d	49,213 mm
B	51,6 mm
G	14 mm
H	189 mm
J	157,2 mm
L	116 mm
s1	32,6 mm
A1	43 mm
A2	15 mm
Noun	Bearing
Bore	1.938 Inch 49.225 Millimeter
Seals	M Seal
Weight	2,25 Kg
UNSPSC	31171501
Category	Flange Block
Inventory	0.0
Width (mm)	51,6
Bolt Spacing	6.188 Inch 157.175 Millimeter
Weight / LBS	5.1
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Mounting Bolts	9/16 Inch
Keyword String	Flanged
Other Features	Single Row Standard Duty Wide Inner Race Open End Has Flinger Y Bearing

Relubricatable	Yes
Bearing number	FYT 1.15/16 TF
Rolling Element	Ball Bearing
Mounting Method	Set Screw
Long Description	2 Bolt Flange Block; 1-15/16" Bore; 6.2" Bolt Circle; 6-3/16" Bolt Spacing; 1 Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 2-1/32" Length Thru Bore; Relubricatable; M Sea
Manufacturer URL	http://www.skf.com
Housing Material	Cast Iron
Length Thru Bore	2.031 Inch 51.6 Millimeter
Weight / Kilogram	2.32
Manufacturer Name	SKF
Insert Part Number	YAR 210-115-2F
Bore Diameter (mm)	49,213
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Cartridge Pilot Depth	0 Inch 0 Millimeter
Harmonized Tariff Code	8483.20.40.40
Fatigue load limit (Pu)	0,98
Manufacturer Item Number	FYT 1.15/16 TF
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Number of Mounting Holes	2
Expansion / Non- expansion	Non-expansion
Basic static load rating (C0)	23,2 kN

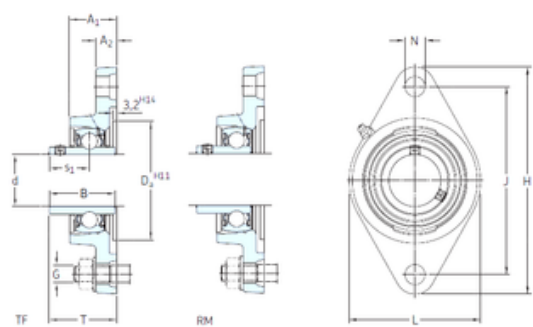

Basic dynamic load rating (C)	35,1 kN
Nominal Bolt Circle Diameter Round	6.2 Inch 157 Millimeter