




Bearing No. FYT 1.3/16 RM

N	12,7 mm
T	42,2 mm
d	30,163 mm
B	31 mm
G	10 mm
H	141,5 mm
J	116,9 mm
L	83 mm
s1	22 mm
A1	32,5 mm
A2	13 mm
Bore	1.188 Inch 30.175 Millimeter
Noun	Bearing
Seals	M Seal
UNSPSC	31171501
Weight	0,88 Kg
Category	Flange Block
Inventory	0.0
Width (mm)	31
Bolt Spacing	4.594 Inch 116.7 Millimeter
Weight / LBS	1.8
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Other Features	Single Row Standard Duty Narrow Inner Race Open End Y Bearing
Keyword String	Flanged
Mounting Bolts	7/16 Inch

Relubricatable	Yes
Bearing number	FYT 1.3/16 RM
Rolling Element	Ball Bearing
Mounting Method	Set Screw
Long Description	2 Bolt Flange Block; 1-3/16" Bore; 4.6" Bolt Circle; 4-19/32" Bolt Spacing; 1 Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 1-7/32" Length Thru Bore; Relubricatable; M Sea
Length Thru Bore	1.219 Inch 30.96 Millimeter
Housing Material	Cast Iron
Manufacturer URL	http://www.skf.com
Weight / Kilogram	0.82
Manufacturer Name	SKF
Insert Part Number	YAT 206-103
Bore Diameter (mm)	30,163
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Cartridge Pilot Depth	0 Inch 0 Millimeter
Harmonized Tariff Code	8483.20.40.40
Fatigue load limit (Pu)	0,475
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Manufacturer Item Number	FYT 1.3/16 RM
Number of Mounting Holes	2
Expansion / Non- expansion	Non-expansion
Basic static load rating (C0)	11,2 kN

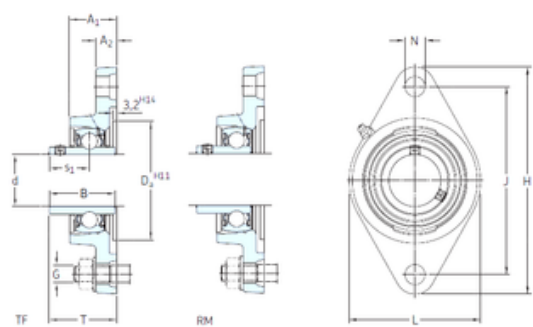

Basic dynamic load rating (C)	19,5 kN
Nominal Bolt Circle Diameter Round	4.6 Inch 117 Millimeter