


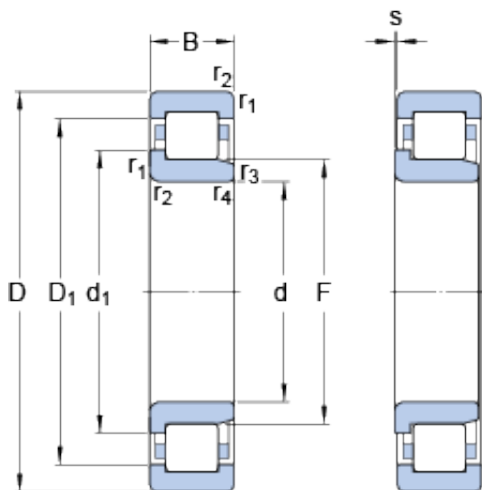

Bearing No. NJ 340 ECML

s	6 mm
d	200 mm
D	420 mm
B	80 mm
F	258 mm
s max.	6 mm
Size (mm)	420x200x80
Width (mm)	80
Mass bearing	56.3 kg
d_1	278 mm
D_1	352.4 mm
Limiting speed	2800 r/min
Bearing number	NJ 340 ECML
Reference speed	1400 r/min
Limiting value e	0.2
d_a min.	220 mm
Bore Diameter (mm)	420
D_a max.	400 mm
d_b min.	282 mm
r_a max.	4 mm
d_a max.	253 mm
Axial load factor Y	0.6
Outer Diameter (mm)	200
r_a - max.	4 mm
D_a - max.	400 mm
d_a - min.	220 mm
$r_{3,4}$ min.	5 mm
d_b - min.	282 mm
d_a - max.	253 mm
$r_{1,2}$ min.	5 mm

d_1 ?	278 mm
D_1 ?	352.4 mm
$r_{3,4}$ - min.	5 mm
$r_{1,2}$ - min.	5 mm
Basic dynamic load rating C	1230 kN
Basic dynamic load rating - C	1230 kN
Fatigue load limit P_u	150 kN
Calculation factor k_r	0.23
Calculation factor - k_r	0.23
Fatigue load limit - P_u	150 kN
Basic static load rating C_0	1630 kN
Basic static load rating - C_0	1630 kN