


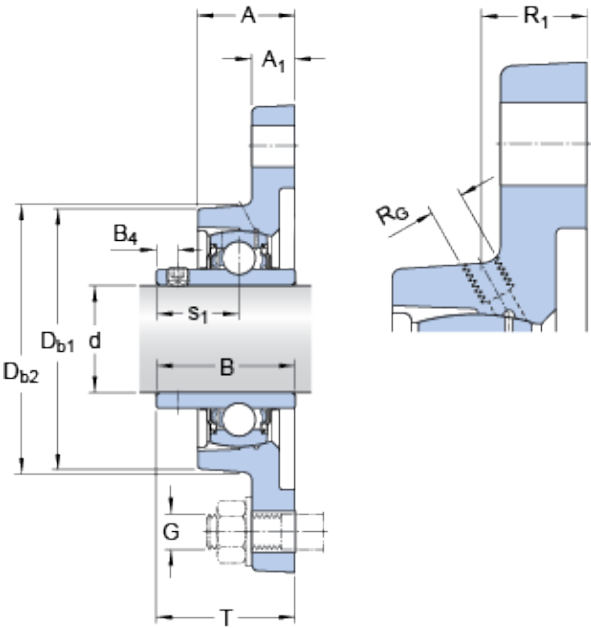

Bearing No. FYT 1.3/4 TF

T	54.2 mm
d	44.45 mm
A	39 mm
B	49.2 mm
J	148.5 mm
H	16 mm
L	111 mm
Bore	1.75 Inch 44.45 Millimeter
Noun	Bearing
Seals	M Seal
UNSPSC	31171501
Category	Flange Block
Inventory	0.0
Size (mm)	44.45x39x14
Width (mm)	14
Weight / LBS	4.2
Bolt Spacing	5.844 Inch 148.438 Millimeter
J ₆	120.5 mm
S ₁	30.2 mm
N ₄	2 mm
D _N	6.579 mm
A ₁	14 mm
B ₄	8 mm
R ₁	24 mm
Inch - Metric	Inch
J ₇	18 mm
Housing Style	2 Bolt Flange Block

Product Group	M06110
Keyword String	Flanged
Other Features	Single Row Standard Duty Wide Inner Race Open End Has Flinger Y Bearing
D _{b1}	102 mm
Relubricatable	Yes
Mounting Bolts	9/16 Inch
Bearing number	FYT 1.3/4 TF
D _{b2}	111 mm
SW _N	11.112 mm
Limiting speed	4300 r/min
Mounting Method	Set Screw
Rolling Element	Ball Bearing
Length Thru Bore	1.938 Inch 49.225 Millimeter
Housing Material	Cast Iron
Manufacturer URL	http://www.skf.com
Long Description	2 Bolt Flange Block; 1-3/4" Bore; 5.8" Bolt Circle; 5-27/32" Bolt Spacing; 1 Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 1-15/16" Length Thru Bore; Relubricatable; M Sea
Manufacturer Name	SKF
Mass bearing unit	1.7 kg
Weight / Kilogram	1.91
Bore Diameter (mm)	44,45
Insert Part Number	YAR 209-112-2F
Pilot Configuration	No Pilot
Outer Diameter (mm)	39

$R_?$	45 °
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Cartridge Pilot Depth	0 Inch 0 Millimeter
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	FYT 1.3/4 TF
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Number of Mounting Holes	2
Expansion / Non-expansion	Non-expansion
R_G - 1/8-27 NPT	1/827 NPT
G_N - 1/8-27 NPT	1/827 NPT
Basic dynamic load rating - C	33.2 kN
Fatigue load limit - P_u	0.915 kN
Nominal Bolt Circle Diameter Round	5.8 Inch 148 Millimeter
Thread - G_2 - 5/16-24 UNF	5/1624 UNF
Hexagonal key size for grub screw - H	3.969 mm
Basic static load rating - C_0	21.6 kN