




Bearing No. FYT 1.5/8 TF

N	15,9 mm
T	54,2 mm
d	41,275 mm
B	49,2 mm
G	14 mm
H	178,5 mm
J	148,4 mm
L	111 mm
s1	30,2 mm
A1	39 mm
A2	14 mm
Bore	1.625 Inch 41.275 Millimeter
Noun	Bearing
Seals	M Seal
UNSPSC	31171501
Weight	1,9 Kg
Category	Flange Block
Inventory	0.0
Width (mm)	49,2
Bolt Spacing	5.844 Inch 148.438 Millimeter
Weight / LBS	4.3
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Other Features	Single Row Standard Duty Wide Inner Race Open End Has Flinger Y Bearing
Keyword String	Flanged
Mounting Bolts	9/16 Inch

Relubricatable	Yes
Bearing number	FYT 1.5/8 TF
Rolling Element	Ball Bearing
Mounting Method	Set Screw
Manufacturer URL	http://www.skf.com
Long Description	2 Bolt Flange Block; 1-5/8" Bore; 5.8" Bolt Circle; 5-27/32" Bolt Spacing; 1 Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 1-15/16" Length Thru Bore; Relubricatable; M Sea
Length Thru Bore	1.938 Inch 49.225 Millimeter
Housing Material	Cast Iron
Weight / Kilogram	2.083
Manufacturer Name	SKF
Insert Part Number	YAR 209-110-2F
Bore Diameter (mm)	41,275
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Cartridge Pilot Depth	0 Inch 0 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Fatigue load limit (Pu)	0,915
Manufacturer Item Number	FYT 1.5/8 TF
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Number of Mounting Holes	2
Expansion / Non- expansion	Non-expansion
Basic static load rating (C0)	21,6 kN

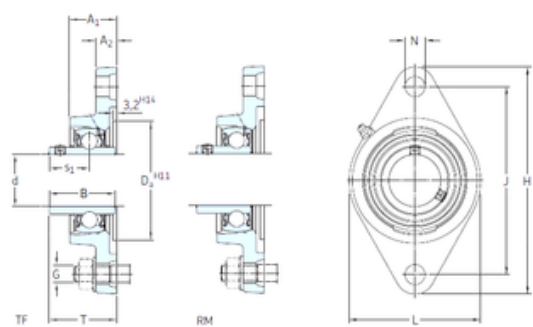

Basic dynamic load rating (C)	33,2 kN
Nominal Bolt Circle Diameter Round	5.8 Inch 148 Millimeter