




Bearing No. FYT 1.7/16 TF

N	14,3 mm
T	46,4 mm
d	36,513 mm
B	42,9 mm
G	12 mm
H	156 mm
J	130,2 mm
L	96 mm
s1	25,4 mm
A1	34,5 mm
A2	13 mm
Bore	1.438 Inch 36.525 Millimeter
Noun	Bearing
Seals	M Seal
UNSPSC	31171501
Weight	1,25 Kg
Category	Flange Block
Inventory	10.0
Width (mm)	42,9
Bolt Spacing	5.125 Inch 130.18 Millimeter
Weight / LBS	2.8
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Other Features	Single Row Standard Duty Wide Inner Race Open End Has Flinger Y Bearing
Keyword String	Flanged
Mounting Bolts	1/2 Inch

Relubricatable	Yes
Bearing number	FYT 1.7/16 TF
Rolling Element	Ball Bearing
Mounting Method	Set Screw
Manufacturer URL	http://www.skf.com
Long Description	2 Bolt Flange Block; 1-7/16" Bore; 5.1" Bolt Circle; 5-1/8" Bolt Spacing; 1 Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 1-11/16" Length Thru Bore; Relubricatable; M Seal
Length Thru Bore	1.688 Inch 42.87 Millimeter
Housing Material	Cast Iron
Weight / Kilogram	1.27
Manufacturer Name	SKF
Insert Part Number	YAR 207-107-2F
Bore Diameter (mm)	36,513
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Cartridge Pilot Depth	0 Inch 0 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Fatigue load limit (Pu)	0,655
Manufacturer Item Number	FYT 1.7/16 TF
Number of Mounting Holes	2
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Expansion / Non- expansion	Non-expansion
Basic static load rating (C0)	15,3 kN

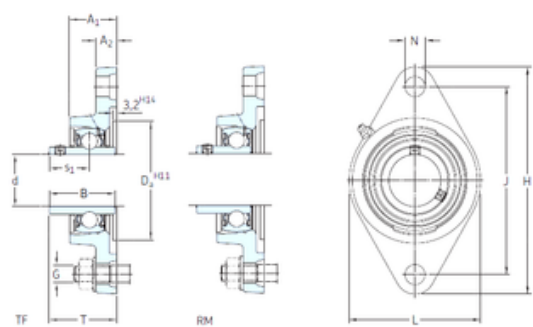

Basic dynamic load rating (C)	25,5 kN
Nominal Bolt Circle Diameter Round	5.1 Inch 130 Millimeter