




Bearing No. FYT 1/2 TF

N	11,1 mm
G	10 mm
T	30,6 mm
L	54 mm
H	98,5 mm
J	76,2 mm
B	27,4 mm
d	12,7 mm
A1	23,4 mm
s1	15,9 mm
A2	11,5 mm
Bore	0.5 Inch 12.7 Millimeter
Noun	Bearing
Seals	M Seal
Weight	0,33 Kg
UNSPSC	31171501
Category	Flange Block
Inventory	0.0
Width (mm)	27,4
Bolt Spacing	3 Inch 76.2 Millimeter
Weight / LBS	0.7
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Mounting Bolts	3/8 Inch
Keyword String	Flanged
Other Features	Single Row Standard Duty Wide Inner Race Open End Has Flinger Y Bearing
Relubricatable	Yes

Bearing number	FYT 1/2 TF
Rolling Element	Ball Bearing
Mounting Method	Set Screw
Long Description	2 Bolt Flange Block; 1/2" Bore; 3" Bolt Circle; 3" Bolt Spacing; 1 Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 1-3/32" Length Thru Bore; Relubricatable; M Seal Seals
Manufacturer URL	http://www.skf.com
Length Thru Bore	1.094 Inch 27.8 Millimeter
Housing Material	Cast Iron
Weight / Kilogram	0.32
Manufacturer Name	SKF
Insert Part Number	YAR 203-008-2F
Bore Diameter (mm)	12,7
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Cartridge Pilot Depth	0 Inch 0 Millimeter
Harmonized Tariff Code	8483.20.40.40
Fatigue load limit (Pu)	0,2
Manufacturer Item Number	FYT 1/2 TF
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Number of Mounting Holes	2
Expansion / Non-expansion	Non-expansion
Basic static load rating (C0)	4,75 kN
Basic dynamic load rating (C)	9,56 kN

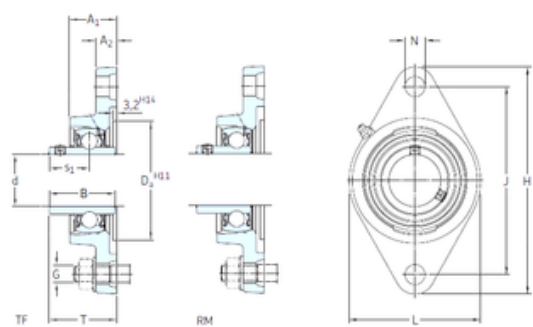

Nominal Bolt Circle Diameter Round	3 Inch 76 Millimeter
---------------------------------------	------------------------