




Bearing No. FYT 15/16 FM

N	10 mm
d	23,813 mm
G	23,5 mm
H	98,8 mm
J	70 mm
L	12,7 mm
T	14 mm
A2	12 mm
Da	124 mm
s1	42,5 mm
A1	30 mm
B1	31 mm
Noun	Bearing
Bore	0.938 Inch 23.825 Millimeter
Seals	M Seal
Weight	0,66 Kg
UNSPSC	31171501
Category	Flange Block
Inventory	0.0
Bolt Spacing	3.906 Inch 99.2 Millimeter
Weight / LBS	1.4
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Bearing number	FYT 15/16 FM
Mounting Bolts	7/16 Inch
Keyword String	Flanged
Relubricatable	Yes
Other Features	Single Row Standard

	Duty Narrow Inner Race Open End Y Bearing
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Long Description	2 Bolt Flange Block; 15/16" Bore; 3.9" Bolt Circle; 3-29/32" Bolt Spacing; 1 Piece Solid; Eccentric Collar Mount; Cast Iron; Ball Bearing; 1-15/64" Length Thru Bore; Relubricatable
Housing Material	Cast Iron
Manufacturer URL	http://www.skf.com
Length Thru Bore	1.234 Inch 31.344 Millimeter
Manufacturer Name	SKF
Weight / Kilogram	0.64
Insert Part Number	YET 205-015
Bore Diameter (mm)	23,813
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Cartridge Pilot Depth	0 Inch 0 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Number of Mounting Holes	2
Manufacturer Item Number	FYT 15/16 FM
Expansion / Non-expansion	Non-expansion
Basic dynamic load rating (C)	7,8 kN
Basic static load rating (C0)	0,335 kN

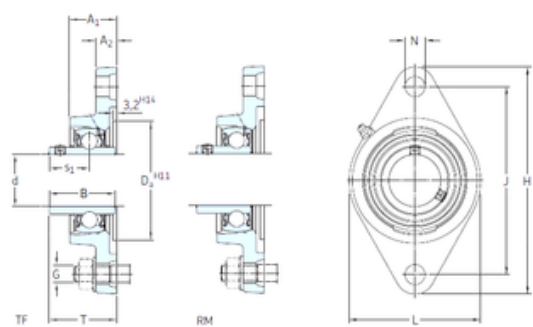

Nominal Bolt Circle Diameter Round	3.9 Inch 99 Millimeter
---------------------------------------	--------------------------