




Bearing No. FYT 2.3/16 FM

N	16 mm
d	55,563 mm
G	36,4 mm
H	184,2 mm
J	127 mm
L	19 mm
T	43,6 mm
A2	20,6 mm
Da	216 mm
s1	65,8 mm
A1	47,6 mm
B1	48,4 mm
Bore	2.188 Inch 55.575 Millimeter
Noun	Bearing
Seals	M Seal
UNSPSC	31171501
Weight	3,35 Kg
Category	Flange Block
Inventory	0.0
Bolt Spacing	7.25 Inch 184.15 Millimeter
Weight / LBS	6.4
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Other Features	Single Row Standard Duty Narrow Inner Race Open End Y Bearing
Keyword String	Flanged
Mounting Bolts	5/8 Inch

Relubricatable	Yes
Bearing number	FYT 2.3/16 FM
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Long Description	2 Bolt Flange Block; 2-3/16" Bore; 7.3" Bolt Circle; 7-1/4" Bolt Spacing; 1 Piece Solid; Eccentric Collar Mount; Cast Iron; Ball Bearing; 1-29/32" Length Thru Bore; Relubricatable;
Length Thru Bore	1.906 Inch 48.42 Millimeter
Manufacturer URL	http://www.skf.com
Housing Material	Cast Iron
Weight / Kilogram	2.91
Manufacturer Name	SKF
Insert Part Number	YET 211-203
Bore Diameter (mm)	55,563
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Cartridge Pilot Depth	0 Inch 0 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	FYT 2.3/16 FM
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Number of Mounting Holes	2
Expansion / Non- expansion	Non-expansion
Basic dynamic load rating (C)	29 kN
Basic static load rating (C0)	1,25 kN

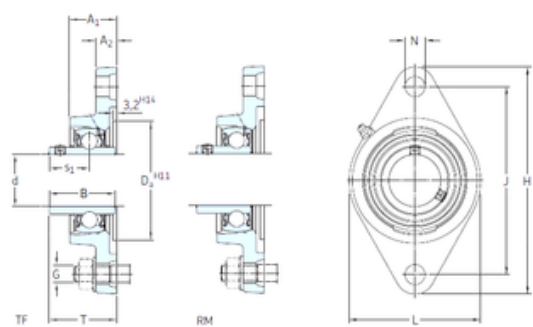

Nominal Bolt Circle Diameter Round	7.3 Inch 184.2 Millimeter
---------------------------------------	--------------------------------