




Bearing No. FYT 2.3/16 TF

N	19 mm
T	62,8 mm
d	55,563 mm
B	55,6 mm
G	16 mm
H	216 mm
J	184,2 mm
L	127 mm
s1	33,4 mm
A1	47,6 mm
A2	20,6 mm
Bore	2.188 Inch 55.575 Millimeter
Noun	Bearing
Seals	M Seal
UNSPSC	31171501
Weight	3,25 Kg
Category	Flange Block
Inventory	0.0
Width (mm)	55,6
Bolt Spacing	7.25 Inch 184.15 Millimeter
Weight / LBS	6.2
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Other Features	Single Row Standard Duty Wide Inner Race Open End Has Flinger Y Bearing
Keyword String	Flanged
Mounting Bolts	5/8 Inch

Relubricatable	Yes
Bearing number	FYT 2.3/16 TF
Rolling Element	Ball Bearing
Mounting Method	Set Screw
Length Thru Bore	2.188 Inch 55.575 Millimeter
Manufacturer URL	http://www.skf.com
Long Description	2 Bolt Flange Block; 2-3/16" Bore; 7.3" Bolt Circle; 7-1/4" Bolt Spacing; 1 Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 2-3/16" Length Thru Bore; Relubricatable; M Seal
Housing Material	Cast Iron
Weight / Kilogram	3.115
Manufacturer Name	SKF
Insert Part Number	YAR 211-203-2F
Bore Diameter (mm)	55,563
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Cartridge Pilot Depth	0 Inch 0 Millimeter
Harmonized Tariff Code	8483.20.40.40
Fatigue load limit (Pu)	1,25
Manufacturer Item Number	FYT 2.3/16 TF
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Number of Mounting Holes	2
Expansion / Non- expansion	Non-expansion
Basic static load rating (C0)	29 kN

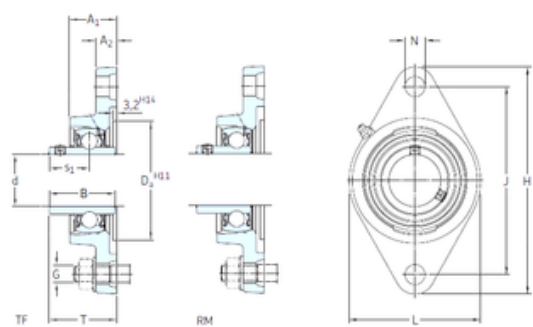

Basic dynamic load rating (C)	43,6 kN
Nominal Bolt Circle Diameter Round	7.3 Inch 184.2 Millimeter