




Bearing No. FYT 3/4 FM

N	10 mm
d	19.05 mm
G	23,5 mm
H	89,7 mm
J	60,3 mm
L	11,1 mm
T	12,7 mm
A2	11,1 mm
Da	112 mm
s1	37,8 mm
A1	24,6 mm
B1	31 mm
Bore	0.75 Inch 19.05 Millimeter
Noun	Bearing
Seals	M Seal
UNSPSC	31171501
Weight	0,53 Kg
Category	Flange Block
Inventory	0.0
Bolt Spacing	3.531 Inch 89.7 Millimeter
Weight / LBS	1
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Other Features	Single Row Standard Duty Narrow Inner Race Open End Y Bearing
Keyword String	Flanged
Mounting Bolts	3/8 Inch

Relubricatable	Yes
Bearing number	FYT 3/4 FM
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Length Thru Bore	1.234 Inch 31.344 Millimeter
Long Description	2 Bolt Flange Block; 3/4" Bore; 3-1/2" Bolt Circle; 3-17/32" Bolt Spacing; 1 Piece Solid; Eccentric Collar Mount; Cast Iron; Ball Bearing; 1-15/64" Length Thru Bore; Relubricatable
Manufacturer URL	http://www.skf.com
Housing Material	Cast Iron
Manufacturer Name	SKF
Weight / Kilogram	0.45
Bore Diameter (mm)	19.05
Insert Part Number	YET 204-012
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Cartridge Pilot Depth	0 Inch 0 Millimeter
Harmonized Tariff Code	8483.20.40.40
Number of Mounting Holes	2
Manufacturer Item Number	FYT 3/4 FM
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Expansion / Non-expansion	Non-expansion
Basic static load rating (C0)	0,28 kN
Basic dynamic load rating (C)	6,55 kN

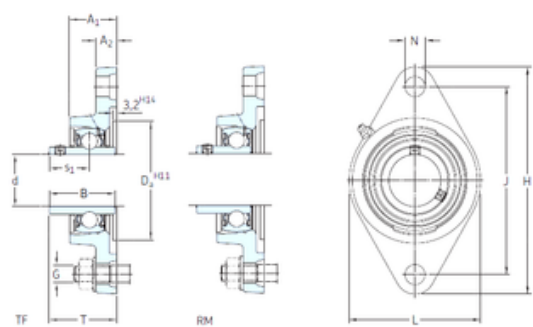

Nominal Bolt Circle Diameter Round	3.5 Inch 90 Millimeter
---------------------------------------	--------------------------