




Bearing No. FYT 3/4 TF/AH

N	11,1 mm
T	32,6 mm
d	19.05 mm
B	31 mm
G	10 mm
H	111,9 mm
J	89,7 mm
L	60,5 mm
s1	18,3 mm
A1	24,6 mm
A2	11,1 mm
Bore	0.75 Inch 19.05 Millimeter
Noun	Bearing
Seals	M Seal
UNSPSC	31171501
Weight	0,5 Kg
Category	Flange Block
Inventory	0.0
Width (mm)	31
Bolt Spacing	3.532 Inch 89.713 Millimeter
Weight / LBS	1.1
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Other Features	Single Row Standard Duty Wide Inner Race Open End Anti Rotation Pin Air Handling Quality Grease Has Flinger Y Bearing

Keyword String	Flanged
Mounting Bolts	3/8 Inch
Relubricatable	Yes
Bearing number	FYT 3/4 TF/AH
Rolling Element	Ball Bearing
Mounting Method	Set Screw
Length Thru Bore	1.221 Inch 31.013 Millimeter
Manufacturer URL	http://www.skf.com
Long Description	2 Bolt Flange Block; 3/4" Bore; 3-1/2" Bolt Circle; 3-17/32" Bolt Spacing; 1 Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 1.221" Length Thru Bore; Relubricatable; M Seal
Housing Material	Cast Iron
Weight / Kilogram	0.5
Manufacturer Name	SKF
Insert Part Number	YAR 204-012-2F/AH
Bore Diameter (mm)	19.05
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Cartridge Pilot Depth	0 Inch 0 Millimeter
Harmonized Tariff Code	8483.20.40.40
Fatigue load limit (Pu)	0,28
Manufacturer Item Number	FYT 3/4 TF/AH
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Number of Mounting Holes	2
Expansion / Non-expansion	Non-expansion
Basic static load rating	6,55 kN

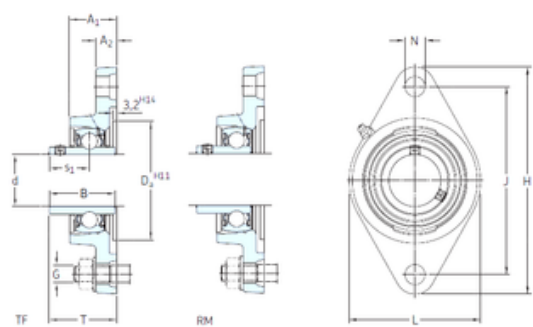

(C0)	
Basic dynamic load rating (C)	12,7 kN
Nominal Bolt Circle Diameter Round	3.5 Inch 90 Millimeter