


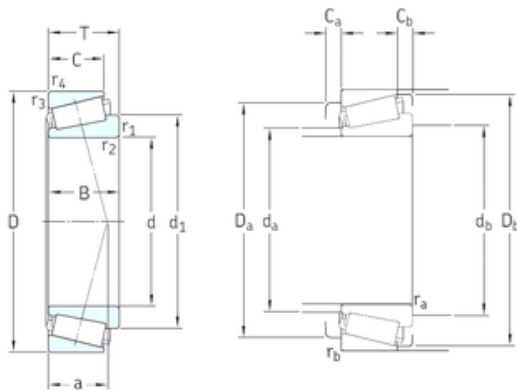

Bearing No. 15103S/15243/Q

D	61,912 mm
d	26,162 mm
T	19,05 mm
B	19,99 mm
C	14,288 mm
a	13 mm
d1	45,8 mm
Weight	0,29 Kg
db min	31 mm
Da min	54 mm
da max	38 mm
Ca min.	4 mm
Cb min.	4,5 mm
Db min.	54 mm
Da max.	55 mm
r1 min.	0,8 mm
r4 min.	2 mm
r3 min.	2 mm
r2 min.	0,8 mm
rb max.	2 mm
ra max.	0,8 mm
Size (mm)	26.162x61.912x19.05
Width (mm)	19,05
Limiting speed	12000 r/min
Bearing number	15103S/15243/Q
Reference speed	8000 r/min
Bore Diameter (mm)	26,162
Outer Diameter (mm)	61,912
Calculation factor (e)	0,35
Calculation factor (Y)	1,7

Fatigue load limit (Pu)	6,2
Basic dynamic load rating (C)	48,4 kN
Basic static load rating (C0)	57 kN