


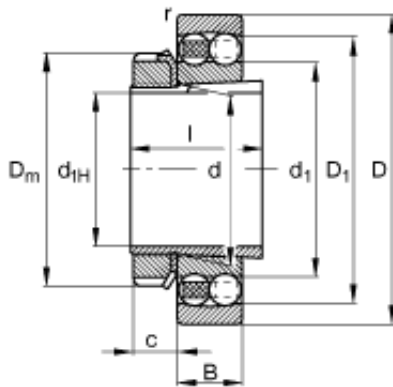

Bearing No. 1322-K-M-C3 + H322

	H322 / Adapter sleeve
B	50 mm
l	77 mm
d	110 mm
e	0,23
m	12,2 kg / Weight
c	21 mm
D	240 mm
Size (mm)	100x240x50
Width (mm)	50
Y_0	2,92
C_1	2,7 mm
m_1	2,21 kg / Weight, adapter sleeve
D_1	203,2 mm
D_m	145 mm
n_G	4500 1/min / Limiting speed
d_1	154,7 mm
Y_2	4,32
n_B	4700 1/min / Reference speed
Y_1	2,79
C_r	165000 N / Dynamic load rating (radial)
Bearing number	1322-K-M-C3 + H322
d_{1H}	100 mm
C_{0r}	71000 N / Static load rating (radial)
C_{ur} -	3300 N / Fatigue limit

	load, radial
$r_{a\ max}$	2,5 mm
$d_{b\ min}$	118 mm
$D_{a\ max}$	226 mm
$B_{a\ min}$	9 mm
$d_{a\ max}$	150 mm
Bore Diameter (mm)	100
Outer Diameter (mm)	240