




Bearing No. 1322-M

|                     |                                         |
|---------------------|-----------------------------------------|
| e                   | 0,23                                    |
| m                   | 12,3 kg / Weight                        |
| d                   | 110 mm                                  |
| D                   | 240 mm                                  |
| B                   | 50 mm                                   |
| Size (mm)           | 110x240x50                              |
| Width (mm)          | 50                                      |
| d <sub>1</sub>      | 154,5 mm                                |
| C <sub>r</sub>      | 165000 N / Dynamic load rating (radial) |
| Y <sub>2</sub>      | 4,32                                    |
| D <sub>1</sub>      | 203,2 mm                                |
| Y <sub>0</sub>      | 2,92                                    |
| Y <sub>1</sub>      | 2,79                                    |
| C <sub>1</sub>      | 2,7 mm                                  |
| n <sub>G</sub>      | 4500 1/min / Limiting speed             |
| n <sub>B</sub>      | 4700 1/min / Reference speed            |
| C <sub>0r</sub>     | 71000 N / Static load rating (radial)   |
| Bearing number      | 1322-M                                  |
| C <sub>ur</sub>     | 3300 N                                  |
| r <sub>min</sub>    | 3 mm                                    |
| r <sub>a max</sub>  | 2,5 mm                                  |
| D <sub>a max</sub>  | 226 mm                                  |
| d <sub>a min</sub>  | 124 mm                                  |
| Bore Diameter (mm)  | 110                                     |
| Outer Diameter (mm) | 240                                     |

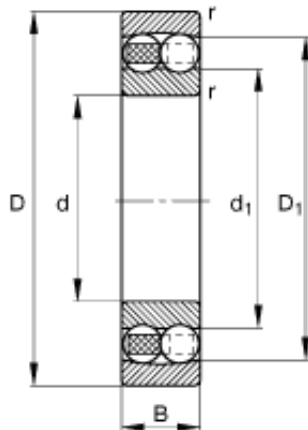