


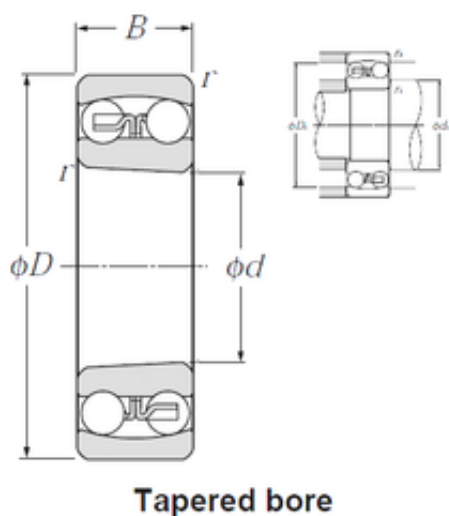

Bearing No. 1322SK

D	240 mm
d	110 mm
B	50 mm
C	50 mm
e	0.22
B1	56 mm
Y0	3
Y2	4.4
Y1	2.8
Mass	12 kg
rs min	3 mm
Da max	227 mm
Ce min	9 mm
db min	117 mm
da max	150 mm
da min	123 mm
ra max	2.5 mm
Weight	12 Kg
r min.	3 mm
Da max.	227 mm
da min.	123 mm
ra max.	2,5 mm
Size (mm)	110x240x50
Width (mm)	50
Nlim (oil)	3,000 rpm
Nlim (grease)	2,400 rpm
Bearing number	1322SK
Precision class	P0
Dynamic load, C	161 kN
Static load, C0	72.5 kN

Bore Diameter (mm)	110
Outer Diameter (mm)	240
Radial clearance class	CN
Calculation factor (e)	0,22
Calculation factor (Y1)	2,8
Calculation factor (Y0)	3
(Oil) Lubrication Speed	3 000 r/min
(Grease) Lubrication Speed	2 400 r/min
Associated sleeve reference	H322X
Basic dynamic load rating (C)	161 kN
Basic static load rating (C0)	72,5 kN
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C