




Bearing No. FYT 7/8 FM

N	10 mm
d	22,225 mm
G	23,5 mm
H	98,8 mm
J	70 mm
L	12,7 mm
T	14 mm
A2	12 mm
Da	124 mm
s1	42,5 mm
A1	30 mm
B1	31 mm
Bore	0.875 Inch 22.225 Millimeter
Noun	Bearing
Seals	M Seal
UNSPSC	31171501
Weight	0,67 Kg
Category	Flange Block
Inventory	0.0
Bolt Spacing	3.891 Inch 98.83 Millimeter
Weight / LBS	1.473
Inch - Metric	Inch
Housing Style	2 Bolt Flange Block
Product Group	M06110
Other Features	Single Row Standard Duty Narrow Inner Race Open End Y Bearing
Keyword String	Flanged
Mounting Bolts	7/16 Inch

Relubricatable	Yes
Bearing number	FYT 7/8 FM
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Long Description	2 Bolt Flange Block; 7/8" Bore; 3.9" Bolt Circle; 3-57/64" Bolt Spacing; 1 Piece Solid; Eccentric Collar Mount; Cast Iron; Ball Bearing; 1-7/32" Length Thru Bore; Relubricatable; M
Housing Material	Cast Iron
Manufacturer URL	http://www.skf.com
Length Thru Bore	1.219 Inch 30.96 Millimeter
Weight / Kilogram	0.669
Manufacturer Name	SKF
Insert Part Number	YET 205-014
Bore Diameter (mm)	22,225
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Cartridge Pilot Depth	0 Inch 0 Millimeter
Harmonized Tariff Code	8483.20.40.40
Number of Mounting Holes	2
Manufacturer Item Number	FYT 7/8 FM
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Expansion / Non-expansion	Non-expansion
Basic dynamic load rating (C)	7,8 kN
Basic static load rating (C0)	0,335 kN

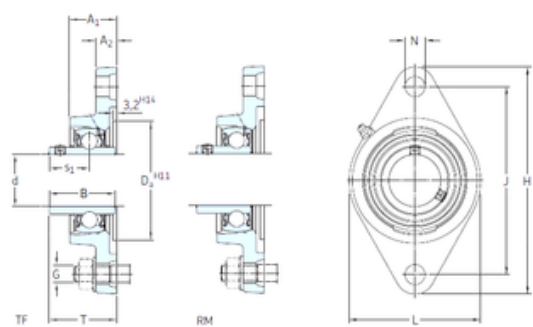

Nominal Bolt Circle Diameter Round	3.9 Inch 99 Millimeter
---------------------------------------	--------------------------