


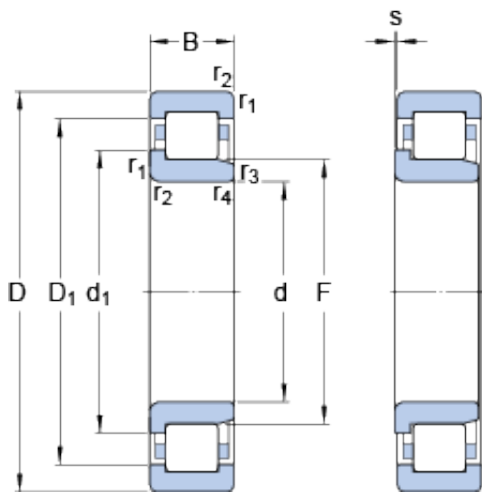

Bearing No. NJ 2330 ECML

s	10.5 mm
d	150 mm
D	320 mm
B	108 mm
F	193 mm
s max.	10.5 mm
Size (mm)	320x150x108
Width (mm)	108
Mass bearing	43.1 kg
d_1	209 mm
D_1	269.8 mm
Limiting speed	4000 r/min
Bearing number	NJ 2330 ECML
Reference speed	2200 r/min
Limiting value e	0.3
d_a min.	167 mm
Bore Diameter (mm)	320
D_a max.	302.2 mm
d_b min.	213 mm
r_a max.	3 mm
d_a max.	188 mm
Axial load factor Y	0.4
Outer Diameter (mm)	150
r_a - max.	3 mm
D_a - max.	302.2 mm
d_a - min.	167 mm
$r_{3,4}$ min.	4 mm
d_b - min.	213 mm
d_a - max.	188 mm
$r_{1,2}$ min.	4 mm

d_1 ?	209 mm
D_1 ?	269.8 mm
$r_{3,4}$ - min.	4 mm
$r_{1,2}$ - min.	4 mm
Basic dynamic load rating C	1370 kN
Basic dynamic load rating - C	1370 kN
Fatigue load limit P_u	170 kN
Calculation factor k_r	0.38
Calculation factor - k_r	0.38
Fatigue load limit - P_u	170 kN
Basic static load rating C_0	1630 kN
Basic static load rating - C_0	1630 kN