


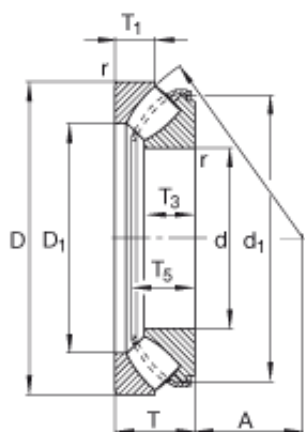

Bearing No. 29430-E1

	30 °
A	92 mm
m	27,2 kg / Weight
d	150 mm
D	300 mm
T	90 mm
Size (mm)	150x300x90
Width (mm)	90
C_a	2000000 N / Dynamic load rating (axial)
T_5	80,5 mm
d_1	267,4 mm
T_3	58 mm
D_1	207,5 mm
T_1	43,4 mm
n_G	2280 1/min / Limiting speed
n_B	1210 1/min / Reference speed
C_{0a}	5300000 N / Static load rating (axial)
Bearing number	29430-E1
C_{ua}	550000 N / Fatigue limit load, axial
r_{min}	4 mm
$r_{a \max}$	3 mm
$d_{b \max}$	175 mm
$D_{b \min}$	306 mm
$D_{a \max}$	253 mm
$d_{a \min}$	220 mm

d _{b1 max}	164 mm
Bore Diameter (mm)	150
Outer Diameter (mm)	300