


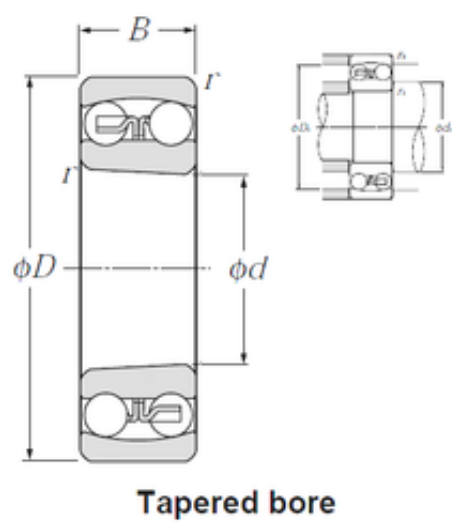

Bearing No. 2208SK

e	0.33
d	40 mm
D	80 mm
B	23 mm
C	23 mm
Y0	2
Y2	3
Y1	1.9
Mass	0.48 kg
ra max	1 mm
Da max	73.5 mm
Ce min	5 mm
db min	44 mm
da max	50 mm
da min	46.5 mm
rs min	1.1 mm
Weight	0,477 Kg
r min.	1,1 mm
Da max.	73,5 mm
da min.	46,5 mm
ra max.	1 mm
Size (mm)	40x80x23
Width (mm)	23
Nlim (oil)	9,000 rpm
Nlim (grease)	7,500 rpm
Bearing number	2208SK
Precision class	P0
Dynamic load, C	22.4 kN
Static load, C0	7.35 kN
Bore Diameter (mm)	40

Outer Diameter (mm)	80
Radial clearance class	CN
Calculation factor (e)	0,33
(Oil) Lubrication Speed	9 000 r/min
Calculation factor (Y1)	1,9
Calculation factor (Y0)	2
(Grease) Lubrication Speed	7 500 r/min
Associated sleeve reference	H308X
Basic dynamic load rating (C)	22,4 kN
Basic static load rating (C0)	7,35 kN
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C