


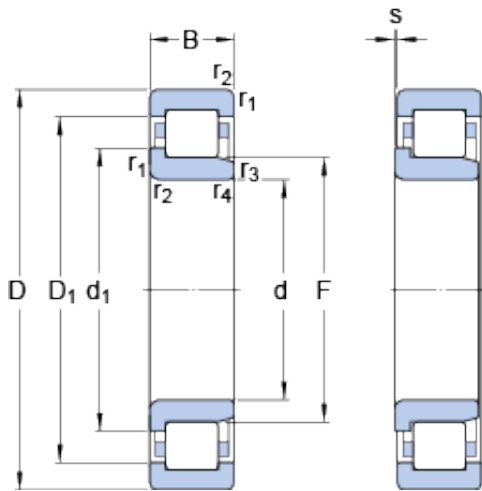

Bearing No. NJ 226 ECM

|                     |            |
|---------------------|------------|
| s                   | 2.1 mm     |
| d                   | 130 mm     |
| D                   | 230 mm     |
| B                   | 40 mm      |
| F                   | 153.5 mm   |
| s max.              | 2.1 mm     |
| Size (mm)           | 230x130x40 |
| Width (mm)          | 40         |
| Mass bearing        | 7.35 kg    |
| $d_1$               | 164 mm     |
| $D_1$               | 200.3 mm   |
| Limiting speed      | 3400 r/min |
| Bearing number      | NJ 226 ECM |
| Reference speed     | 3200 r/min |
| Limiting value e    | 0.2        |
| $d_a$ min.          | 144 mm     |
| Bore Diameter (mm)  | 230        |
| $D_a$ max.          | 215.4 mm   |
| $d_b$ min.          | 167 mm     |
| $r_a$ max.          | 2.5 mm     |
| $d_a$ max.          | 150 mm     |
| Axial load factor Y | 0.6        |
| Outer Diameter (mm) | 130        |
| $r_a$ - max.        | 2.5 mm     |
| $D_a$ - max.        | 215.4 mm   |
| $d_a$ - min.        | 144 mm     |
| $r_{3,4}$ min.      | 3 mm       |
| $d_b$ - min.        | 167 mm     |
| $d_a$ - max.        | 150 mm     |
| $r_{1,2}$ min.      | 3 mm       |

|                                  |          |
|----------------------------------|----------|
| $d_1$ ?                          | 164 mm   |
| $D_1$ ?                          | 200.3 mm |
| $r_{3,4}$ - min.                 | 3 mm     |
| $r_{1,2}$ - min.                 | 3 mm     |
| Basic dynamic load rating C      | 415 kN   |
| Basic dynamic load rating - C    | 415 kN   |
| Fatigue load limit $P_u$         | 51 kN    |
| Calculation factor $k_r$         | 0.15     |
| Calculation factor - $k_r$       | 0.15     |
| Fatigue load limit - $P_u$       | 51 kN    |
| Basic static load rating $C_0$   | 455 kN   |
| Basic static load rating - $C_0$ | 455 kN   |