


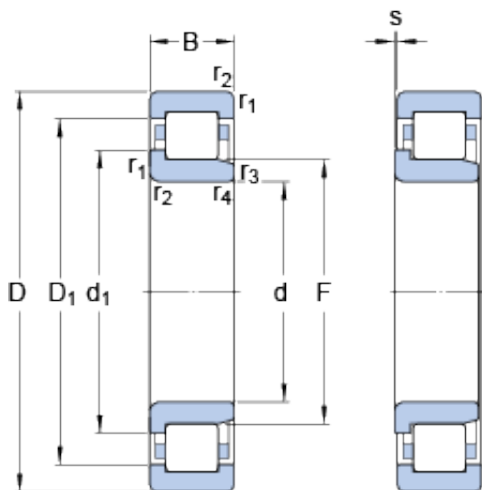

Bearing No. NJ 2220 ECJ

s	2.5 mm
d	100 mm
D	180 mm
B	46 mm
F	119 mm
s max.	2.5 mm
Size (mm)	180x100x46
Width (mm)	46
Mass bearing	5.3 kg
d_1	127 mm
D_1	155.6 mm
Limiting speed	4500 r/min
Bearing number	NJ 2220 ECJ
Reference speed	4000 r/min
Limiting value e	0.3
d_a min.	113 mm
Bore Diameter (mm)	180
D_a max.	167.5 mm
d_b min.	130 mm
r_a max.	2 mm
d_a max.	116 mm
Axial load factor Y	0.4
Outer Diameter (mm)	100
r_a - max.	2 mm
D_a - max.	167.5 mm
d_a - min.	113 mm
$r_{3,4}$ min.	2.1 mm
d_b - min.	130 mm
d_a - max.	116 mm
$r_{1,2}$ min.	2.1 mm

d_1 ?	127 mm
D_1 ?	155.6 mm
$r_{3,4}$ - min.	2.1 mm
$r_{1,2}$ - min.	2.1 mm
Basic dynamic load rating C	380 kN
Basic dynamic load rating - C	380 kN
Fatigue load limit P_u	54 kN
Calculation factor k_r	0.2
Calculation factor - k_r	0.2
Fatigue load limit - P_u	54 kN
Basic static load rating C_0	450 kN
Basic static load rating - C_0	450 kN