


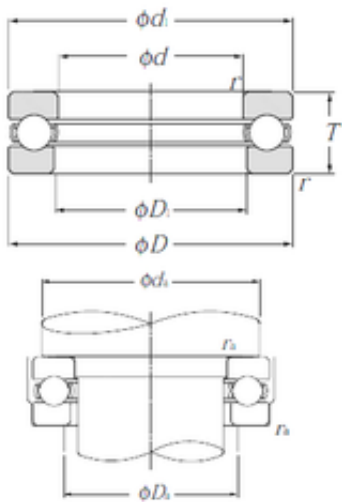

Bearing No. 51140

D	250 mm
d	200 mm
T	37 mm
d1	247 mm
D1	203 mm
Noun	Bearing
UNSPSC	31171552
Banded	No
Bore 1	7.874 Inch 200 Millimeter
Height	1.457 Inch 37 Millimeter
r min.	1,1 mm
Bore 2	7.992 Inch 203 Millimeter
Weight	3,92 Kg
ra max.	1 mm
Da max.	220 mm
da min.	230 mm
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	200x250x37
Width (mm)	37
Weight / LBS	8.64212
maximum rpm:	1400 rpm
Inch - Metric	Metric
Product Group	B00308
Cage Material	Steel
Other Features	Single Row With Flat Seat
Bearing number	51140

cage material:	Steel
Thrust Bearing	Yes
overall width:	37 mm
Keyword String	Ball Thrust
bore diameter:	200 mm
fillet radius:	1.1 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	200MM Bore 1; 203MM Bore 2; 250MM Outside Diameter; 37MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	9.843 Inch 250 Millimeter
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	3.743
Manufacturer Name	NTN
precision rating:	ISO Class 0
outside diameter:	247 mm
Bore Diameter (mm)	200
Outer Diameter (mm)	250
Minimum Buy Quantity	N/A
separable or banded:	Separable
thrust bearing type:	Single-Direction
Component Description	Roller Assembly Plus Raceways
static load capacity:	675000 N
dynamic load capacity:	172000 N
Harmonized Tariff Code	8482.10.50.08

outside diameter design:	Straight
Single or Double Direction	Single Direction
(Grease) Lubrication Speed	960 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	675 kN
Basic dynamic load rating (C)	172 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter