


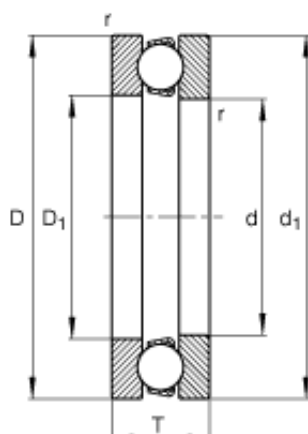

**Bearing No. 51140-MP**

|                     |                                        |
|---------------------|----------------------------------------|
| m                   | 4,12 kg / Weight                       |
| A                   | 2,4 / Factor min. load                 |
| d                   | 200 mm                                 |
| D                   | 250 mm                                 |
| T                   | 37 mm                                  |
| Size (mm)           | 200x250x37                             |
| Width (mm)          | 37                                     |
| d <sub>1</sub>      | 247 mm                                 |
| n <sub>G</sub>      | 1980 1/min / Limiting speed            |
| D <sub>1</sub>      | 203 mm                                 |
| C <sub>a</sub>      | 170000 N / Dynamic load rating (axial) |
| C <sub>0a</sub>     | 655000 N / Static load rating (axial)  |
| Bearing number      | 51140-MP                               |
| C <sub>ua</sub>     | 22700 N / Fatigue limit load, axial    |
| r <sub>min</sub>    | 1,1 mm                                 |
| r <sub>a max</sub>  | 1 mm                                   |
| d <sub>a min</sub>  | 230 mm                                 |
| D <sub>a max</sub>  | 220 mm                                 |
| Bore Diameter (mm)  | 200                                    |
| Outer Diameter (mm) | 250                                    |