


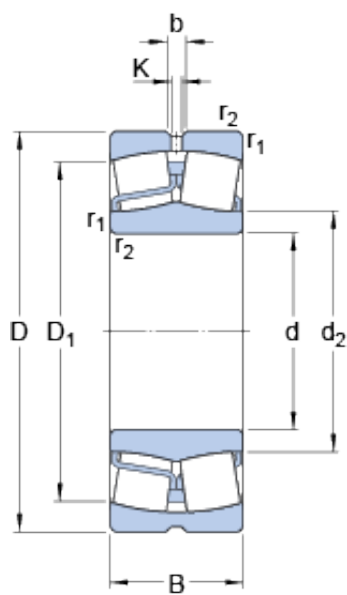

Bearing No. 22219 E

b	8.3 mm
K	4.5 mm
d	95 mm
D	170 mm
B	43 mm
Noun	Bearing
Bore	3.74 Inch 95 Millimeter
Width	1.693 Inch 43 Millimeter
UNSPSC	31171510
series:	222
Category	Spherical Roller Bearing
Size (mm)	170x95x43
Enclosure	Open
Inventory	0.0
Width (mm)	43
bore type:	Straight
maximum rpm:	4800 RPM
Weight / LBS	9.296
Bore Profile	Straight
Mass bearing	4.15 kg
Cage Material	Steel
closure type:	Open
d ₂	112 mm
D ₁	150 mm
Inch - Metric	Metric
Product Group	B04311
Limiting speed	4800 r/min
fillet radius:	2 mm
cage material:	Steel

overall width:	43 mm
Keyword String	Spherical
Withdrawal Nut	Not Applicable
Relubricatable	Yes
bore diameter:	95 mm
Bearing number	22219 E
finish/coating:	Uncoated
Mounting Method	Shaft Mount
Rolling Element	Spherical Roller Bearing
Reference speed	3600 r/min
Manufacturer URL	http://www.skf.com
outer ring type:	Not Split
Long Description	95MM Straight Bore; 170MM Outside Diameter; 43MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
Outside Diameter	6.693 Inch 170 Millimeter
outer ring width:	43 mm
precision rating:	Not Rated
outside diameter:	170 mm
Manufacturer Name	SKF
bearing material:	Steel
Withdrawal Sleeve	Not Applicable
Weight / Kilogram	4.22
Bore Diameter (mm)	170
Internal Clearance	C0-Medium
r _a max.	2 mm
D _a max.	158 mm

d _a min.	107 mm
Outer Diameter (mm)	95
Adapter Part Number	Not Applicable Inch Not Applicable Millimeter
internal clearance:	C0
d _a - min.	107 mm
r _a - max.	2 mm
Calculation factor e	0.24
D _a - max.	158 mm
Minimum Buy Quantity	N/A
r _{1,2} min.	2.1 mm
D ₁ ?	150 mm
d ₂ ?	112 mm
static load capacity:	450 kN
dynamic load capacity:	380 kN
lubrication hole type:	Lubrication Groove & Hole
Calculation factor - e	0.24
Harmonized Tariff Code	84823080
r _{1,2} - min.	2.1 mm
Number of Rows of Rollers	Double Row
Basic dynamic load rating C	393 kN
operating temperature range:	Maximum of +390 °F
Basic dynamic load rating - C	393 kN
Calculation factor Y ₀	2.8
Calculation factor Y ₂	4.2
Calculation factor Y ₁	2.8
Fatigue load limit P _u	45.5 kN
Calculation factor - Y ₁	2.8
Fatigue load limit - P _u	45.5 kN

Calculation factor - Y_2	4.2
Calculation factor - Y_0	2.8
Basic static load rating C_0	450 kN
Basic static load rating - C_0	450 kN