


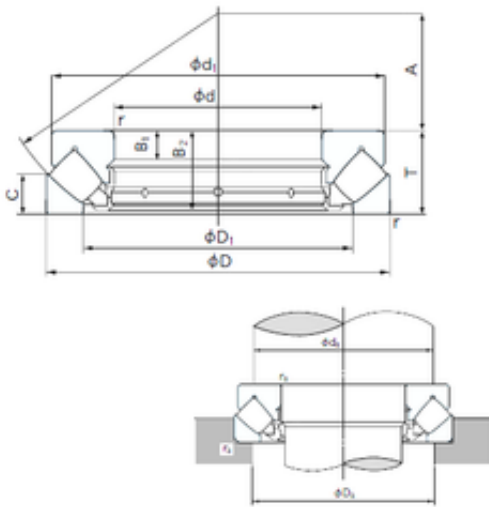

Bearing No. 29434E

C	50 mm
B	37 mm
d	170 mm
D	340 mm
T	103 mm
A	104 mm
B1	37 mm
D1	243 mm
d1	324 mm
B2	99 mm
Width	103 mm
r min.	5 mm
Weight	44.0 Kg
da min.	245 mm
Da max.	285 mm
ra max.	4 mm
da (min)	245 mm
Da (max)	285 mm
ra (max)	4 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	170 mm
Size (mm)	170x340x103
Width (mm)	103
Configuration	Single Row
Bearing number	29434E
Outside Diameter	340 mm
Static Load Rating	5,900,000 N
Bore Diameter (mm)	170
Dynamic Load Rating	1,670,000 N

Outer Diameter (mm)	340
Limiting Speed - Oil	950 rpm
Fillet Radius/Chamfer	5 mm
Basic dynamic load rating (C)	1670 kN
Basic static load rating (C0)	5900 kN