




Bearing No. 241/600-B-K30-MB+AH241/600

n	23,5 mm
C	375 mm
b	50 mm
a	30 mm
l	425 mm
d	600 mm
D	980 mm
B	375 mm
d5	12,5 r/min
D1	833 mm
d1	570 mm
Weight	1288 Kg
r min.	7,5 mm
da min.	632 mm
Da max.	948 mm
ra max.	6 mm
Size (mm)	600x980x375
Width (mm)	375
Thread (G)	Tr625X6
Limiting speed	450 r/min
Bearing number	241/600-B-K30-MB+AH241/600
Reference speed	149 r/min
Bore Diameter (mm)	600
Outer Diameter (mm)	980
Calculation factor (e)	0,38
Fatigue load limit (Pu)	1780
Calculation factor (Y0)	1,75
Calculation factor (Y1)	1,79
Basic dynamic load rating (C)	11600 kN

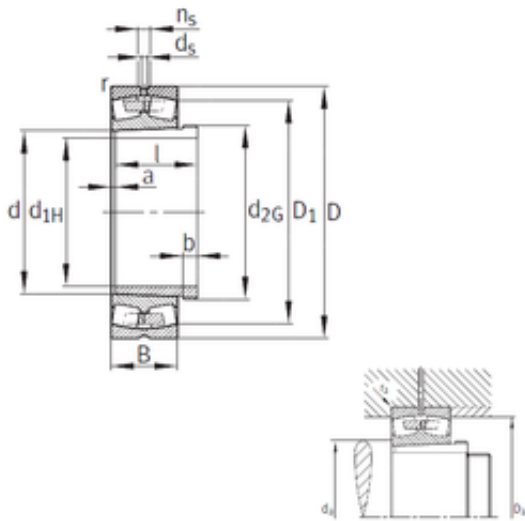

Loyal | 241/600-B-K30-MB+AH241/600

Basic static load rating (C0)	26000 kN
----------------------------------	----------